SCHULTHESS
Professional

Washing machine – Professional

proLine W220 / W300



This is the Schulthess proLine The Game Changer. With this professional machine you save time, do more laundry, cut costs and protect the environment at the same time. The figures prove it: The proLine handles 500 more laundry loads every year. The 24 and 33-kilo machines are perfectly suited to the needs of care institutions, hospitals and facility management companies with their wetClean programmes.

Models



proLine W220
Stone
4206.1



proLine W220
Carbon
4206.1



proLine W300
Stone
4207.1



proLine W300
Carbon
4207.1

Features

- Industrial washing machine for gentle fabric care
- Control with 24 standard programmes and 24 freely programmable positions
- Intuitive operation with 4.3" colour display
- High spin speed for minimum residual moisture (up to 48 %)
- Stainless steel drum and washing liquor tank for efficient washing and rinsing processes
- Cold, hot or soft water connection (selectable on site)
- Language selection button with over 20 different languages
- Start delay with calendar function
- Swiss made and designed for over 30'000 operating hours

Options

- WLAN interface for programming and OTA configuration
- Connection for 8 liquid detergent dosing pumps
- Standard machine plinth
- Mains blocking set (load shedding/current peak)


Caution: Colour tone may vary due to lighting conditions, screen or print quality.
View the machines in a showroom or order material samples from your advisor.

SWISS MADE

Technical data Washing machine proLine

Brand names		**Schulthess**	**Schulthess**
Model name		**proLine W220**	**proLine W300**
Product number		4206.1	4207.1
Basic data			
Rated capacity (1:9)	kg	24	33
Capacity ratio 1:10	kg	22	30
Height	mm	1555	1555
Width	mm	1050	1050
Height incl. base	mm	1815	1815
Bottom edge of door incl. base	mm	805	805
Depth with closed door	mm	970	1150
Weight empty	kg	455	545
Drum volume	L	220	300
Door opening diameter	mm	450	450
Drum opening	mm	800	800
Drum depth	mm	437	597
Spin speed	U/min	1000	950
g-factor		447	404
Residual moisture	%	48	48
Supply voltage	V	400	400
Mains frequency 50Hz		•	•
Mains frequency 60Hz			
Connected load	kW	20	26
Heating power	kW	17.4	22.5
Drive power	kW	2.2	3
Fuse protection	A	32	50
Water connection diameter	"	3/4	3/4
Drain valve diameter	mm	76.2	76.2
Drain pump diameter	mm		
Water pressure on site	Mpa	0.15-1	0.15-1
Cold water inflow (hard)	l/min	›65	›65
Hot water inflow (max. 70°C)	l/min	›30	›30
Drain rate (drain valve)	l/min	260	260
Drain rate (drain pump)	l/min		
Number of languages		26	26
Country of manufacture		CH	CH
Features			
Drain pump			
Drain valve		•	•
Mains interlock set		O	O
USB connection			
Hygiene monitoring			
prePaid with RFID (available as retrofit kit)			
Connectivity with RFID and Ethernet		O	O
Connectivity		O	O
Connection for 8 liquid detergent dosing pumps		O	O
Extension module for connection of up to 14 liquid detergent dosing pumps			
Machine plinth		O	O
Mop plinth			
Additional machine data			
Name and address of supplier		Schulthess Maschinen AG, CH-6330 Cham ZG	Schulthess Maschinen AG, CH-6330 Cham ZG

Explanations • = permanently integrated O = optional W = selectable

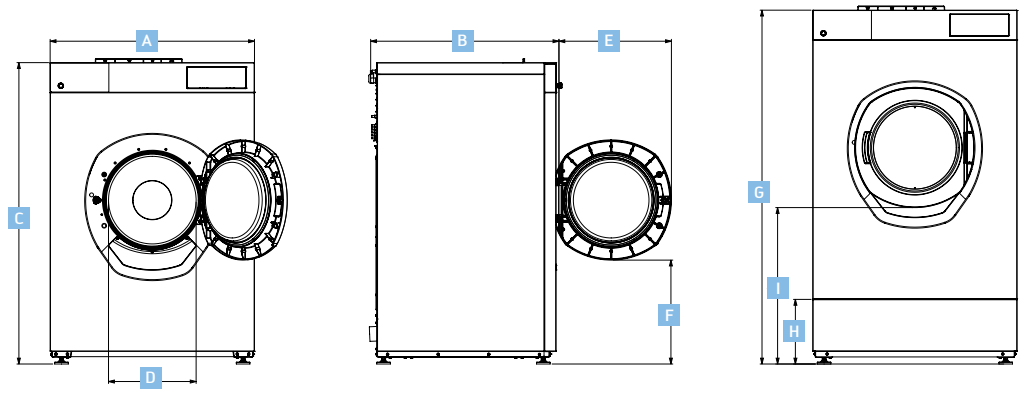

	A	B	C	D	E	F	G	H	I
W220	1050	970	1555	450	580	535	1815	335	805
W300	1050	1150	1555	450	580	535	1815	335	805

 All rights reserved

SCHULTHESS