



### ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.  
Digital speed and temperature display.



### EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.  
Automatic shutdown at 80°C (adjustable parameter).  
Fumes circulation circuit from the bottom reducing energy consumption.



### ROBUSTNESS

Roll driving by inverter.  
Nomex quality feeding and ironing belts: high temperatures resistant.  
Skinplate and stainless steel panels: long lasting.  
Coiled felt for greater lifespan.



### ERGONOMICS

Acoustic comfort: <65 dba.  
Appropriate height of feeding: 990 mm.  
Compact design: fits in many spaces.  
Electronic control with Auto mode: easy to use, optimized ironing speed.




### MAINTENANCE

Easy access to all components on both sides of the machine.  
Basic connections : electrical connection and air extraction.



### OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.  
Front feeding and return.  
Built-in cool down system.  
Polished steel roll Ø 200mm.  
Roll length: 1.400, 1.600 and 2.000mm.  
Electric heating.  
CE standard

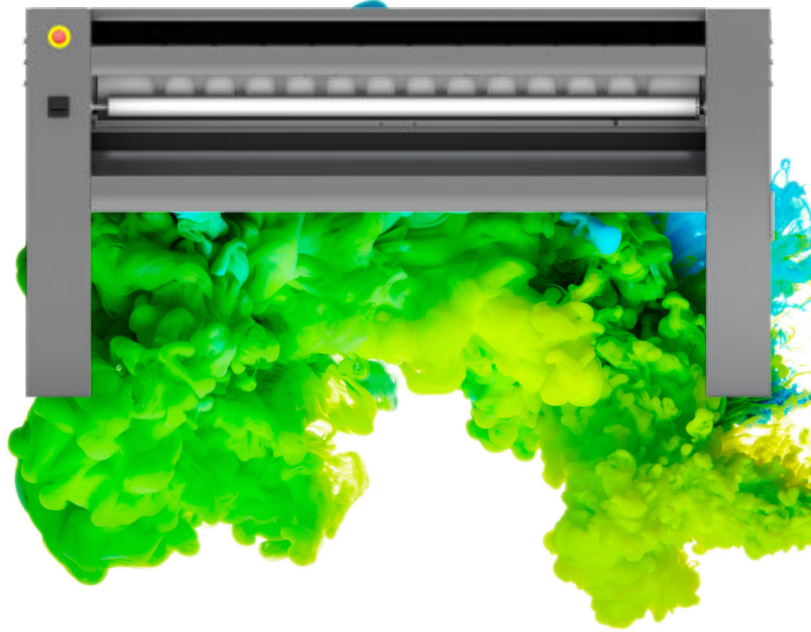


### OPTIONS

- 440V 3~ 50/60Hz No N (maritime)
- Maritime wooden packing CM-1620

| GENERAL DETAILS                          | UNIT.        | CM-1620 M           |     |
|------------------------------------------|--------------|---------------------|-----|
| Theoretical production Electric heating* | Kg/h         | 16                  |     |
|                                          | lb/h         | 35                  |     |
| Roll Ø                                   | mm           | 200                 |     |
|                                          | inch         | 7,87                |     |
| Working width                            | mm           | 1.600               |     |
|                                          | inch         | 63,0                |     |
| Height floor-feeding belts               | mm           | 990                 |     |
|                                          | inch         | 39,0                |     |
| Working speed                            | m/min        | 1.5-6               |     |
|                                          | ft/min       | 4.9-19.6            |     |
| Electronic control                       | -            | Si                  |     |
| No. Programs                             | Nº           | 2                   |     |
| Length folder                            | Nº           | NO                  |     |
| Large surface contact with linen         | º            | 270                 |     |
| POWER                                    |              |                     |     |
| Electric heating power                   | Kw           | 12                  |     |
| Total electric power                     | Kw           | 12,34               |     |
| Roll motor power                         | Kw           | 0,28                |     |
| Fan motor power                          | Kw           | 0,09                |     |
| CONNECTIONS                              |              | E                   | G   |
| Tension 230V 1N + T                      | Nº x mm² / A | N/A                 | N/A |
|                                          | nº x AWG/A   | N/A                 | N/A |
| Tension 230V 3~ + T                      | Nº x mm² / A | 4 x 10 / 40A        | N/A |
|                                          | nº x AWG/A   | 4 x 7 / 40A         | N/A |
| Tension 400V 3~N + T                     | Nº x mm² / A | 5 x 4 / 20A         | N/A |
|                                          | nº x AWG/A   | 5 x 11 / 20A        | N/A |
| OVERALL DIMENSIONS / PACKING DIMENSIONS  |              |                     |     |
| Net width / Gross width                  | mm           | 2.128 / 2.340       |     |
|                                          | inch         | 83,8 / 92,1         |     |
| Net depth / gross depth**                | mm           | 444** (666) / 770   |     |
|                                          | inch         | 17.5* (26.2) / 30,3 |     |
| Net height / gross height                | mm           | 1.110 / 1.400       |     |
|                                          | inch         | 43,7 / 55,1         |     |
| Net weight / gross weight                | kg           | 203 / 240           |     |
|                                          | lbs          | 448 / 529           |     |
| Net volume / Gross volume                | m³           | 1,05 / 2,52         |     |
|                                          | f³           | 37,12 / 89,08       |     |
| OTHERS                                   |              |                     |     |
| No. Fume outlet                          | Nº           | 1                   |     |
| Ø Fume outlet                            | mm           | 83                  |     |
|                                          | inch         | 3,27                |     |
| Air Flow                                 | m³/h         | 300                 |     |
|                                          | cfm          | 177                 |     |
| Sound level                              | dB           | 55                  |     |
| Evaporation power                        | l/h          | 7,2                 |     |
|                                          | USgallon/h   | 1,9                 |     |

\* 45% moisture

\*\* Rear fan disassembly

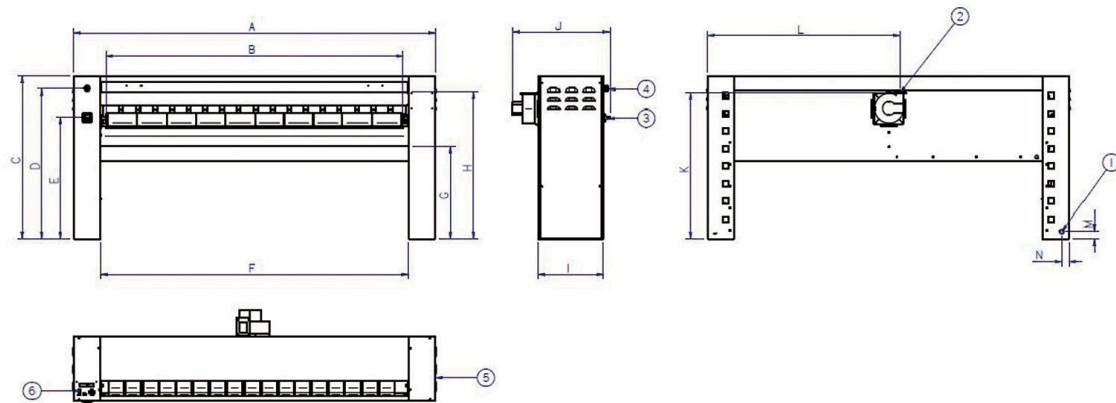

|           | A     | B     | C     | D     | E   | F     | G   | H     | I   | J   | K   | L     | M  | N  |
|-----------|-------|-------|-------|-------|-----|-------|-----|-------|-----|-----|-----|-------|----|----|
| CM-1420 M | 1.878 | 1.470 | 1.110 | 1.028 | 830 | 1.510 | 631 | 1.006 | 444 | 666 | 995 | 1.015 | 50 | 50 |
| CM-1620 M | 2.128 | 1.720 | 1.110 | 1.028 | 830 | 1.760 | 631 | 1.006 | 444 | 666 | 995 | 1.141 | 50 | 50 |
| CM-2020 M | 2.478 | 2.070 | 1.110 | 1.028 | 830 | 2.110 | 631 | 1.006 | 444 | 666 | 995 | 1.316 | 50 | 50 |