



ELECTRONIC CONTROL

M programmer: push buttons to control temperature and time.



OUTSTANDING FEATURES

Reversing drum action as standard.
Galvanised steel drum.
Frequency inverter as standard.



EFFICIENCY

Big fluff filter.



VERSATILITY

Make to order - customisation.
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry.



ERGONOMICS

Biggest door diameters.
Opening sense of door adjustable on site.



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.



OTHERS

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved




OPTIONS

- Natural gas heated tumble dryer
- Opposite door opening
- Back panel with air filter
- M programmer display
- Maritime wooden packing DLM-11
- 230V 3~ 50 Hz DLM-11/14/18 E
- 400V 3N 60 Hz DLM-11-35
- 230V 3~ 60 Hz DLM-11/14/18 E
- 230V 3~ 60 Hz DLM-35 G/S
- 230V 1N 50 Hz DLM-11 E
- 440/480V 3~ 60 Hz DLM-11/14/18
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DLM-11
Capacity 1/18		Kg	11,7
		lb	25,7
Capacity 1/20		Kg	10,5
		lb	23,1
Ø Drum		mm	750
		inch	29,53
Drum length		mm	475
		inch	18,70
Drum volume		l	210
		cu ft	7,41
Ø Door hole		mm	574
		inch	22,60
Door center height		mm	976
		inch	38,4
Height from floor to bottom of door		mm	618
		inch	24,33
ELECTRIC HEATING			
Evaporation capacity		L/h	9,3
		US gallon/h	2,46
Hourly output		Kg/h	20,3
		lb/h	44,8
Installed heating power		kW	12
Installed electrical power		kW	12,67
GAS HEATING			
Evaporation capacity (gas model)		L/h	14,5
		US gallon/h	3,830
Hourly output (gas model)		Kg/h	29
		lb/h	63,1
Installed gas heating power		kcal/h	17627
		Btu/h	69996
Installed gas heating power		kW	20,5
Installed electrical power		kW	0,67
Instant propane gas consumption (G31)		Kg/h	1,76
		lb/h	3,88
Instant natural gas consumption (G20)		m³/h	2,17
		cfm	1,28
Ø Gas inlet		BSPP ISO 228-1	1/2"
POWER AND VENTILATION			
Drum motor power		kW	0,37
Fan motor power		kW	0,25
Nominal air flow rate		m³/h	850
		cfm	500
Ø Fume exhaust		mm	200
		inch	7,87
HEAT EMISSION			
Maximum total heat emission		kW	1,2
		Btu/h	4097
Max. front heat emission		kW	0,8
		Btu/h	2868
CONNECTIONS		E	G / S
Tension 230V - I + N + T	Nº x mm² / A	3 x 25 / 63A	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 10 / 40A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 4 / 25A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width		mm	785 / 865
		inch	30,9 / 34,1

Net / gross depth	mm	855 / 940
	inch	33,7 / 37
Net / gross height	mm	1.694 / 1.840
	inch	66,7 / 72,4
Net / gross weight	Kg	172 / 180
	lb	379 / 397

OTHERS		
Sound level	dB	64

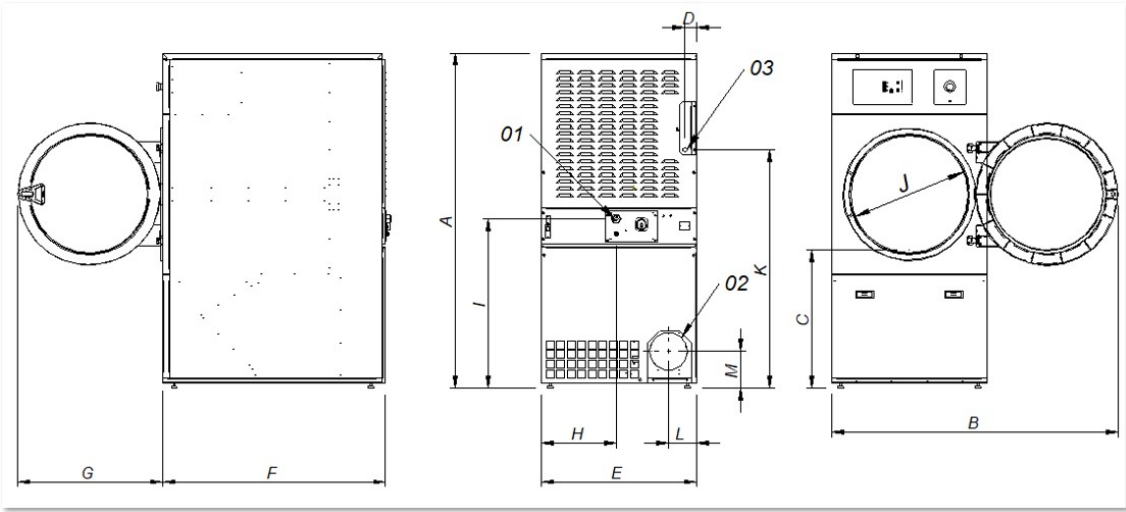

01 Power supply
02 Fumes output Ø 200
03 Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
DLM-11	1.694	1.447	689	68	785	855	735	380	870	575	1.226	133	180
DLM-14	1.694	1.447	689	68	785	989	735	380	870	575	1.226	133	180