



ELECTRONIC CONTROL

M programmer: push buttons to control temperature and time.



OUTSTANDING FEATURES

Reversing drum action as standard.
Galvanised steel drum.
Frequency inverter as standard.



EFFICIENCY

Big fluff filter.



VERSATILITY

Make to order - customisation.
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry.



ERGONOMICS

Biggest door diameters.
Opening sense of door adjustable on site.



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.



OTHERS

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved




OPTIONS

- Natural gas heated tumble dryer
- Opposite door opening
- Back panel with air filter
- M programmer display
- Maritime wooden packing DLM-14/18
- 230V 3~ 50 Hz DLM-11/14/18 E
- 400V 3N 60 Hz DLM-11-35
- 230V 3~ 60 Hz DLM-11/14/18 E
- 230V 3~ 60 Hz DLM-35 G/S
- 440/480V 3~ 60 Hz DLM-11/14/18
- Reduced power (12kw instead of 18kw) for electric heated DTM-14/18 models.
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DLM-18	
Capacity 1/18	Kg	18,3	
	lb	40,4	
Capacity 1/20	Kg	16,5	
	lb	36,3	
Ø Drum	mm	750	
	inch	29,53	
Drum length	mm	746	
	inch	29,37	
Drum volume	l	330	
	cu ft	11,64	
Ø Door hole	mm	574	
	inch	22,60	
Door center height	mm	976	
	inch	38,4	
Height from floor to bottom of door	mm	618	
	inch	24,33	
ELECTRIC HEATING			
Evaporation capacity	L/h	14,10	
	US gallon/h	3,72	
Hourly output	Kg/h	28,3	
	lb/h	62,4	
Installed heating power	kW	18	
Installed electrical power	kW	18,67	
GAS HEATING			
Evaporation capacity (gas model)	L/h	16,30	
	US gallon/h	4,306	
Hourly output (gas model)	Kg/h	32,6	
	lb/h	70,3	
Installed gas heating power	kcal/h	17627	
	Btu/h	69996	
Installed gas heating power	kW	20,5	
Installed electrical power	kW	0,67	
Instant propane gas consumption (G31)	Kg/h	1,76	
	lb/h	3,88	
Instant natural gas consumption (G20)	m³/h	2,17	
	cfm	1,28	
Ø Gas inlet	BSPP ISO 228-1	1/2"	
POWER AND VENTILATION			
Drum motor power	kW	0,37	
Fan motor power	kW	0,25	
Nominal air flow rate	m³/h	850	
	cfm	500	
Ø Fume exhaust	mm	200	
	inch	7,87	
HEAT EMISSION			
Maximum total heat emission	kW	1,8	
	Btu/h	6145	
Max. front heat emission	kW	1,3	
	Btu/h	4302	
CONNECTIONS		E	G / S
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 16 / 63A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 10 / 32A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	785 / 865	
	inch	30,9 / 34,1	

Net / gross depth	mm	1.125 / 1.210
	inch	44,3 / 47,6
Net / gross height	mm	1.694 / 1.840
	inch	66,7 / 72,4
Net / gross weight	Kg	187 / 200
	lb	412 / 441
OTHERS		
Sound level	dB	64

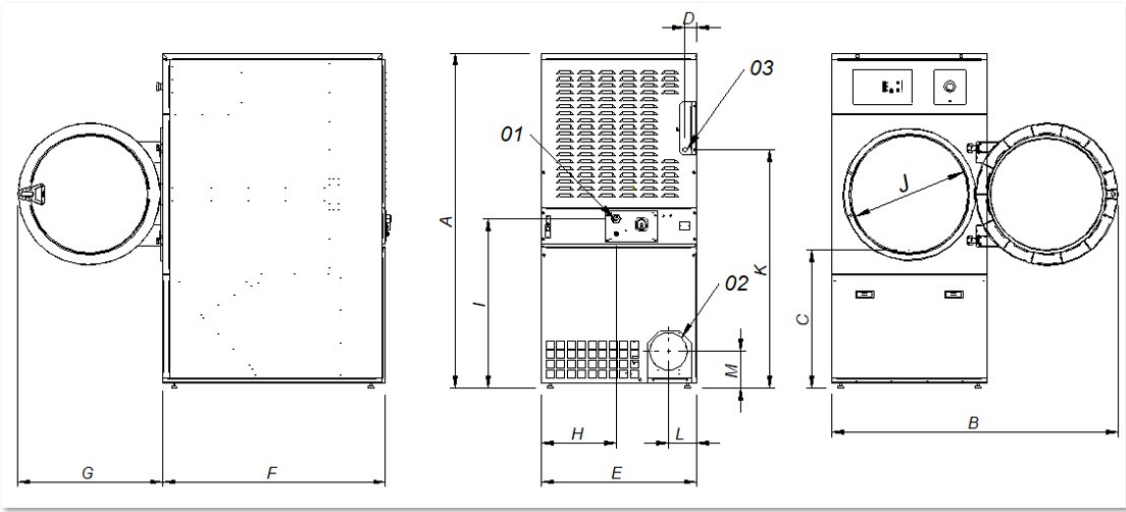

01 Power supply
02 Fumes output Ø 200
03 Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
DLM-18	1.694	1.447	689	68	785	1.125	735	380	870	575	1.226	133	180
DLM-22	1.812	1.552	743	112	890	1.255	735	107	920	575	1.344	238	180