



ELECTRONIC CONTROL

M programmer: push buttons to control temperature and time.



OUTSTANDING FEATURES

Reversing drum action as standard.
Galvanised steel drum.
Frequency inverter as standard.



EFFICIENCY

Big fluff filter.



VERSATILITY

Make to order - customisation.
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry.



ERGONOMICS

Biggest door diameters.
Opening sense of door adjustable on site.



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.



OTHERS

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved




OPTIONS

- 400V 3~60Hz DLM-28/35
- Natural gas heated tumble dryer
- Opposite door opening
- Back panel with air filter
- M programmer display
- Maritime wooden packing DLM-28
- 400V 3N 60 Hz DLM-11-35
- 230V 3~ 50 Hz DLM-22/28/35 E
- 230V 3~ 60 Hz DLM-22/28/35 E
- 230V 3~ 60 Hz DLM-35 G/S
- 440/480V 3~ 60 Hz DLM-22/28/35
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.		DLM-28	
Capacity 1/18		Kg		30,6	
		lb		67,3	
Capacity 1/20		Kg		27,5	
		lb		60,6	
Ø Drum		mm		947	
		inch		37,28	
Drum length		mm		780	
		inch		30,71	
Drum volume		l		550	
		cu ft		19,42	
Ø Door hole		mm		802	
		inch		31,57	
Door center height		mm		1.040	
		inch		40,94	
Height from floor to bottom of door		mm		578	
		inch		22,74	
ELECTRIC HEATING					
Evaporation capacity		L/h		26,1	
		US gallon/h		6,9	
Hourly output		Kg/h		48,4	
		lb/h		106,7	
Installed heating power		kW		30	
Installed electrical power		kW		31,15	
GAS HEATING					
Evaporation capacity (gas model)		L/h		30,9	
		US gallon/h		8,163	
Hourly output (gas model)		Kg/h		59,3	
		lb/h		130,7	
Installed gas heating power		kcal/h		35254	
		Btu/h		139899	
Installed gas heating power		kW		41	
Installed electrical power		kW		1,15	
Instant propane gas consumption (G31)		Kg/h		3,51	
		lb/h		7,74	
Instant natural gas consumption (G20)		m³/h		4,34	
		cfm		2,55	
Ø Gas inlet		BSPP ISO 228-1		1/2"	
POWER AND VENTILATION					
Drum motor power		kW		0,55	
Fan motor power		kW		0,55	
Nominal air flow rate		m³/h		1.200	
		cfm		706	
Ø Fume exhaust		mm		200	
		inch		7,87	
HEAT EMISSION					
Maximum total heat emission		kW		3	
		Btu/h		10242	
Max. front heat emission		kW		2,1	
		Btu/h		7170	
CONNECTIONS				E	G / S
Tension 230V - I + N + T		Nº x mm² / A		-	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm² / A		4 x 35 / 100A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm² / A		5 x 16 / 63A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING					
Net / gross width		mm		985 / 1.065	
		inch		38,8 / 41,9	

Net / gross depth	mm	1.054 / 1.154
	inch	41,5 / 45,4
Net / gross height	mm	1.975 / 2.080
	inch	77,8 / 81,9
Net / gross weight	Kg	230 / 260
	lb	507 / 573
OTHERS		
Sound level	dB	65

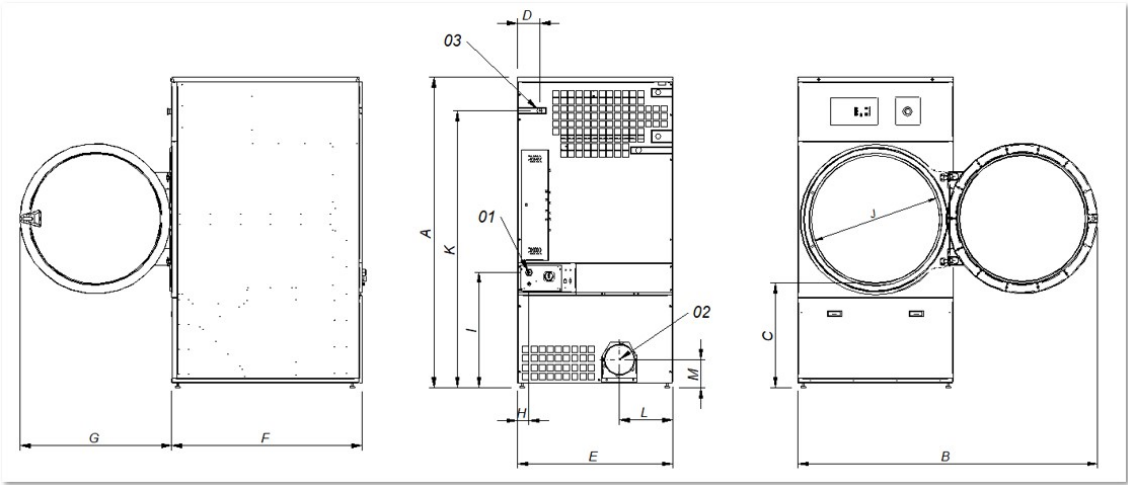

01 Power supply
02 Fumes output Ø 200
03 Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
DLM-28	1.975	1.910	660	141	985	1.054	970	70	730	802	1.768	337	178
DLM-35	1.975	1.910	660	141	985	1.210	970	70	730	802	1.768	337	178