



ELECTRONIC CONTROL

M programmer: push buttons to control temperature and time.



OUTSTANDING FEATURES

Reversing drum action as standard.
Galvanised steel drum.
Frequency inverter as standard.



EFFICIENCY

Big fluff filter.



VERSATILITY

Make to order - customisation.
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry.



ERGONOMICS

Biggest door diameters.
Opening sense of door adjustable on site.



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.



OTHERS

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved




OPTIONS

- 400V 3~60Hz DLM-28/35
- Natural gas heated tumble dryer
- Opposite door opening
- Back panel with air filter
- M programmer display
- Maritime wooden packing DLM-35
- 400V 3N 60 Hz DLM-11-35
- 230V 3~ 50 Hz DLM-22/28/35 E
- 230V 3~ 60 Hz DLM-22/28/35 E
- 230V 3~ 60 Hz DLM-35 G/S
- 440/480V 3~ 60 Hz DLM-22/28/35
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DLM-35	
Capacity 1/18	Kg	36,7	
	lb	80,8	
Capacity 1/20	Kg	33	
	lb	72,8	
Ø Drum	mm	947	
	inch	37,28	
Drum length	mm	936	
	inch	36,85	
Drum volume	l	660	
	cu ft	23,30	
Ø Door hole	mm	802	
	inch	31,57	
Door center height	mm	1.040	
	inch	40,94	
Height from floor to bottom of door	mm	578	
	inch	22,74	
ELECTRIC HEATING			
Evaporation capacity	L/h	31,1	
	US gallon/h	8,22	
Hourly output	Kg/h	60	
	lb/h	132,3	
Installed heating power	kW	36	
Installed electrical power	kW	37,15	
GAS HEATING			
Evaporation capacity (gas model)	L/h	32,1	
	US gallon/h	8,480	
Hourly output (gas model)	Kg/h	63,9	
	lb/h	140,9	
Installed gas heating power	kcal/h	35254	
	Btu/h	139899	
Installed gas heating power	kW	41	
Installed electrical power	kW	1,15	
Instant propane gas consumption (G31)	Kg/h	3,51	
	lb/h	7,74	
Instant natural gas consumption (G20)	m³/h	4,34	
	cfm	2,55	
Ø Gas inlet	BSPP ISO 228-1	1/2"	
POWER AND VENTILATION			
Drum motor power	kW	0,55	
Fan motor power	kW	0,55	
Nominal air flow rate	m³/h	1.200	
	cfm	706	
Ø Fume exhaust	mm	200	
	inch	7,87	
HEAT EMISSION			
Maximum total heat emission	kW	3,6	
	Btu/h	12291	
Max. front heat emission	kW	2,5	
	Btu/h	8604	
CONNECTIONS		E	G / S
Tension 230V - I + N + T	Nº x mm² / A	-	3 x 1,5 / 16A
Tension 230V - III + T	Nº x mm² / A	4 x 50 / 125A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm² / A	5 x 16 / 63A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	985 / 1.065	
	inch	38,8 / 41,9	

Net / gross depth	mm	1.210 / 1.310
	inch	47,6 / 51,6
Net / gross height	mm	1.975 / 2.080
	inch	77,8 / 81,9
Net / gross weight	Kg	260 / 285
	lb	573 / 628
OTHERS		
Sound level	dB	65

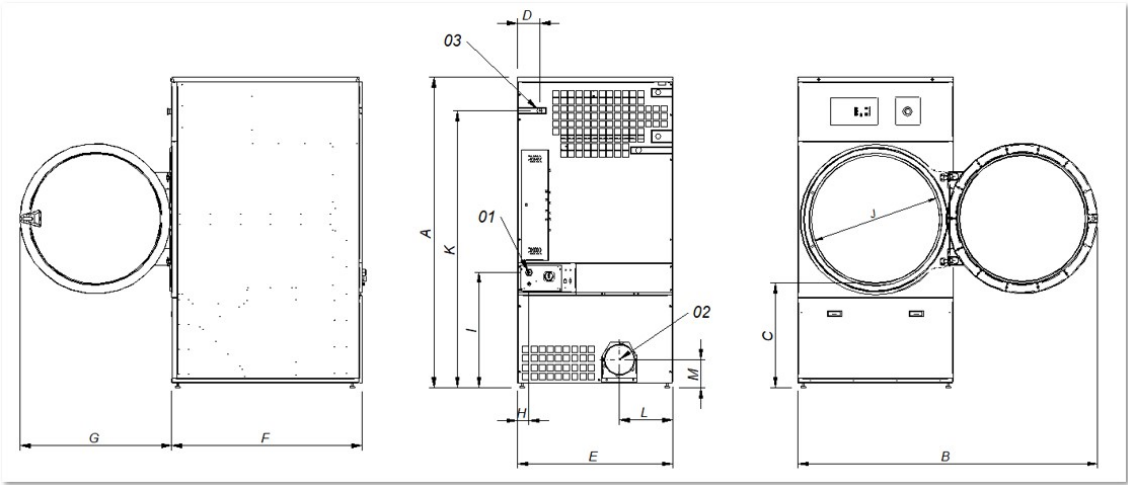

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
DLM-28	1.975	1.910	660	141	985	1.054	970	70	730	802	1.768	337	178
DLM-35	1.975	1.910	660	141	985	1.210	970	70	730	802	1.768	337	178