



TOUCH II

User friendly and totally programmable Touch II with 7" coloured touch screen.
USB Connection. Online platform free of charge for programming, telemetry, data analysis, etc. thanks to the IoT.
Videos on displays (ads, instructions, etc.)
37 languages.



OUTSTANDING FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.



EFFICIENCY

DOUBLE FLOW - Mixed axial-radial airflow.
EFFICIENT DRY: Smart humidity sensor.
Big fluff filter.
Double door glass.
Low energy consumption.



VERSATILITY

Make to order - customisation.
Wet Cleaning.
OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses.
No need of exhaust to the exterior.



CONNECTIVITY

IoT **DOMUSCONNECT**
Management of laundries: OPL and COIN.
Remote payment.



ERGONOMICS

Drawer as fluff filter, made of stainless steel.
Biggest door diameters.
Opening sense of door adjustable on site.



MAINTENANCE

Hinged panel: easy and ergonomic access.
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance.



OTHERS


Grey skinplate outer casing, stainless steel look.
SOFT DRY - new drum with stamped holes.
COOL DOWN - anti-wrinkle at the end of the cycle.
FULL SCREEN FILTER: new filter drawer with wide surface.
CE approved.



OPTIONS

- Front and side panels in AISI 304 stainless steel DTT-14/18
- Front panel in AISI 304 stainless steel DTT-11/14/18 HPi
- License IoT - DOMUSCONNECT
- Maritime wooden packing DTT-14/18
- Opposite door opening DTT-14/18/22 HPi
- Tropicalized model DTT-14/18/22 HPi
- Stainless steel front and side panels DTT-18 HPi
- Front panel in stainless steel DTT-11/14/18 HPi
- Maritime wooden packing DTT-18 HPi

CAPACITY	UNIT.	DTT-18 HPI ECO-ENERGY
Capacity 1/18	Kg	18,3
	Lb	40,4
Capacity 1/20	Kg	16,5
	Lb	36,3
Evaporation capacity (elec. model)	L/h	7,1
	USGallon/h	1,88
Hourly output (elec. model)	Kg/h	14,1
	lb/h	31,1
Efficiency	kWh/L	0,43
DRUM		
Ø Drum	mm	750
	inch	29,5
Ø Door	mm	574
	inch	22,6
Door center height	mm	976
	inch	38,4
Load hole bottom height	mm	689
	inch	27,13
Drum length	mm	746
	inch	24,33
Drum volume	L	330
	cu ft	11,64
POWER		
Drum motor power	kW	0,37
Fan motor power	kW	0,17
Heating power	kW	3,28
Total electric power (elec. model)	kW	3,82
DIMENSIONS		
Net width	mm	785
	inch	30,9
Net depth	mm	1.125
	inch	44,3
Net height	mm	1.694
	inch	66,7
Net weight	Kg	307
	lb	677
PACKING DIMENSIONS		
Gross width	mm	865
	inch	34,1
Gross depth	mm	1.210
	inch	47,6
Gross height	mm	1.840
	inch	72,4
Gross weight	Kg	320
	lb	705
OTHERS		
Max airflow	m ³ /h	VARIABLE
Ø Fume exhaust	mm	NO
Sound level	dB	61
Drain for moisture extraction (hose)	Ø / Length (mm)	12/2000
	Ø / Length (inch)	0,47 / 78,74

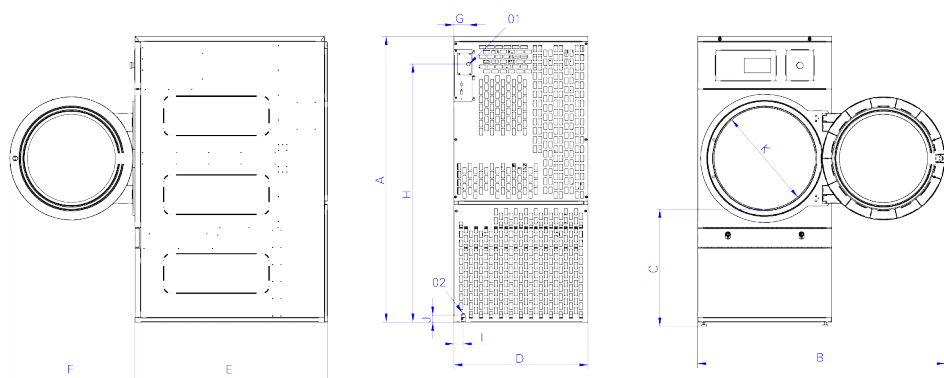

01. Electrical connection
 02. Condensed water evacuation
 2000mm hose (1) and 12mm
 diameter
 (1) For greater distances,
 consult the installation manual.

	A	B	C	D	E	F	G	H	I	J	K
DTT-11 HPi	1694	1450	689	785	855	730	85	1530	55	90	574
DTT-14 HPi	1694	1450	689	785	989	730	85	1530	55	90	574
DTT-18 HPi	1694	1450	689	785	1125	730	85	1530	55	90	574
DTT-22 HPi	1812	1500	743	890	1255	730	90	1650	90	90	574