



TOUCH II

- User-friendly and fully programmable Touch II with 4.3" colour touch screen.
- Precise control, fully programmable and configurable.
- DOMUSCONNECT: standard and free IoT.
- Videos on display (ads, instructions, etc.).
- More than 35 languages available.



EASY INSTALLATION & MAINTENANCE

- **No water connection required for cooling:**
 - Fewer maintenance points.
- **No need for external extraction:**
 - No exhaust required.
 - Less space required.
 - Less installation work and no special permits needed.
- Front access to the heat pump and filters.



OUTSTANDING FEATURES

- Drum rotation reversal.
- Frequency inverter.
- Double dedicated lint filter.
- Stainless steel drum.



VERSATILITY

- Made to order - customisation.
- Wet Cleaning.
- OPL > Self service: standard OPL model easily transformable for coin-operated use.



EFFICIENCY

- Highly efficient: direct savings.
- EFFICIENT DRY: moisture sensor.
- Drum rotation reversal.
- Frequency inverter.
- Axial airflow system.



CONNECTIVITY

- **DOMUSCONNECT:** free IoT.
 - Laundry management: OPL and coin laundry, remotely.
 - Remote assistance.
 - Revenue control (self-service) and much more.



ROBUSTNESS

- Outer cabinet in grey skinplate.
- Robust aluminium door.
- Powerful airflow.
- Robust construction of the frame and panels.
- Wide ambient temperature range.



OTHERS


- **FULL SCREEN FILTER:** Fluff filter as drawer, not in the door.



OPTIONS

- License IoT - DOMUSCONNECT
- Outer casing stainless steel for HPI AISI 304
- Reverse door opening
- Tropicalized model (TOUCH II)
- Several payment systems for self-service
- 400V 3~ 50/60Hz HPI (to check price)
- 440-480V 3~ 60 Hz (marine)

CAPACITY	UNIT.	HPD-8 TOUCH II HPi
Capacity 1/18	Kg	8,9
	Lb	19,6
Capacity 1/20	Kg	8,0
	Lb	17,6
Evaporation capacity (elec. model)	L/h	4,2
	USGallon/h	1,11
Hourly output (elec. model)	Kg/h	8,4
	lb/h	18,52
Efficiency	kWh/L	0,44
DRUM		
Ø Drum	mm	590
	inch	23,2
Ø Door	mm	480
	inch	18,9
Door center height	mm	918
	inch	36,1
Load hole bottom height	mm	684
	inch	26,93
Drum length	mm	585
	inch	24,17
Drum volume	L	160
	cu ft	5,65
POWER		
Drum motor power	kW	0,37
Fan motor power	kW	0,17
Heating power	kW	2,2
Total electric power (elec. model)	kW	2,74
DIMENSIONS		
Net width	mm	680
	inch	26,8
Net depth	mm	750
	inch	29,5
Net height	mm	1.400
	inch	55,1
Net weight	Kg	165
	lb	364
PACKING DIMENSIONS		
Gross width	mm	710
	inch	28
Gross depth	mm	832
	inch	32,8
Gross height	mm	1520
	inch	59,8
Gross weight	Kg	174
	lb	384
OTHERS		
Max airflow	m³/h	VARIABLE
Ø Fume exhaust	mm	NO
Sound level	dB	61
Drain for moisture extraction (hose)	Ø / Length (mm)	12/2000
	Ø / Length (inch)	0,47 / 78,74

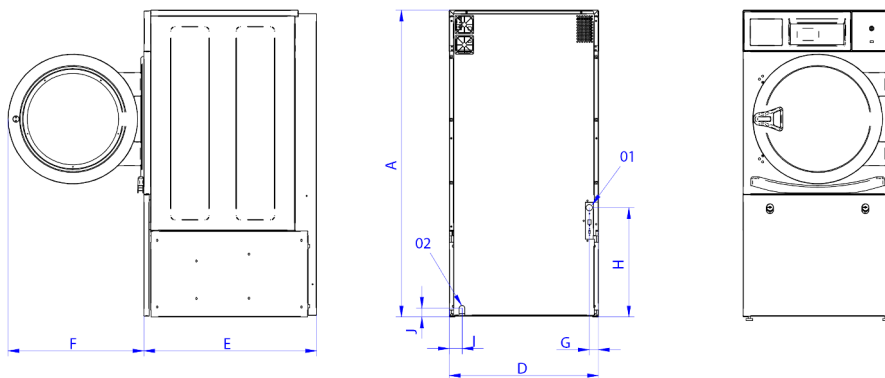

01. Electrical connection
 02. Condensed water evacuation
 2000mm hose (1) and 12mm
 inner diameter
 (1) For greater distances,
 consult the installation manual.

		A	B	C	D	E	F	G	H	I	J	K
HPD-8 TOUCH II HPI	mm	1.400	1.227	665	665	784	615	42	505	60	50	480
HPD-10 TOUCH II HPI	mm	1.400	1.227	665	680	784	615	42	505	60	50	480