



ELECTRONIC CONTROL

NPR models: electronic control.

- Three-digit display.
- Manual control.

NPR ECO-ENERGY models: M control.

- Large display with two lines of text.
- Two control modes: manual and automatic.
 - Automatic ironing speed control.
 - Maintains an optimal temperature.



EFFICIENCY

• **NPR ECO-ENERGY:**

- +33% more productivity.

• **NPR and NPR ECO-ENERGY:**

- High heat retention thanks to the chest insulation.
- Adaptation to different fabric thicknesses.



ROBUSTNESS

- Models with Nomex coating: resistant to high temperatures.
- Grey skinplate and stainless steel panels.
- Wooden feeding table.
- Industrial components, more durable.
- Gas spring located under the chest.
- Klixon thermostat, greater safety and reliability.



OUTSTANDING FEATURES

- Roll lifting control by pedal or automatic roll lifting control by foot cell detection.
- **NPR models:**
 - Speed control via potentiometer (option).
- **NPR ECO-ENERGY Models:**
 - Large roll contact area with the linen.
 - Mode of operation identical to a flatwork ironer: no roll lifting, more ergonomic.
 - Models equipped with Nomex belts, suction and variable speed inverter, more productivity.
 - Adjustable speed and temperature.




MAINTENANCE

- Easy installation: requires only an electrical connection.
- Easy access on both sides for maintenance.
- Quick and easy dismantling of bearings.
- Thermostat and probe accessible from the rear without removing the heating plate.



OTHERS

- Front feeding and return.
- Roll Ø 250 mm. Working widths: 1.400, 2.000mm.
- Electric heating.
- CE certification.

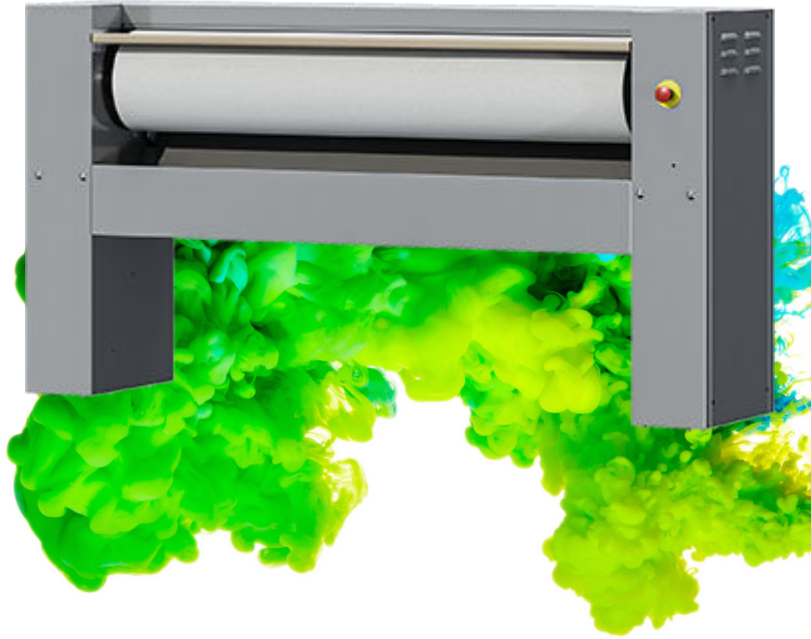


OPTIONS

- 230V 3 + N + T 60Hz (250mm)
- 400V 3 + N + T 60Hz (250 mm, STD in ECO-ENERGY)
- 440V 3 60Hz No N (marine)
- Speed control (except ECO-ENERGY)
- Pedal control instead of photocell (except ECO-ENERGY)

GENERAL DETAILS		UNIT.	NPR-1025
Theoretical production 20-25% humidity		Kg/h	27,50
		Lb/H	60,63
Roll Ø		mm	250
		Inch	9,84
Working width		mm	1.000
		Inch	39,37
Working speed		m/min	3,2
		ft/mn	10,50
SC speed control (option)		m/min	1,5 - 4,5
		ft/mn	4,9 - 14,7
Nomex quality coating		-	NO
Electronic control		-	YES
Chest motion		-	AUTO
POWER			
Heating power		Kw	4,95
Roll motor power		Kw	0,18
Fan motor power		Kw	-
Total electric power		Kw	5,13
CONNEXIONS			
Tension 230 V I + N + T		nº x mm²/A	3 x 6 / 25A
		nº x AWG/A	3 x 9 / 25A
Tension 230 V III + T		nº x mm²/A	4 x 2,5 / 16A
		nº x AWG/A	4 x 13 / 16A
Tension 400 V III + N + T		nº x mm²/A	5 x 2,5 / 10A
		nº x AWG/A	5 x 13 / 10A
DIMENSIONS			
Net / gross width		mm	1.462 / 1.490
		inch	58 / 59
Net / gross depth		mm	484 / 540
		inch	19 / 21
Net / gross height		mm	985 / 1.130
		inch	39 / 44
Net / gross weight		Kg	114 / 124
		Lb	251 / 273
Net / gross volume		m³	0,69 / 0,91
		ft³	24,37 / 32,14
OTHERS			
No. Fume outlet		Nº	-
Ø Fume outlet		mm	-
		inch	-
Air flow		m³/h	-
		cfm	-
Noise Level		dB	55

* 20%-25% theoretical production

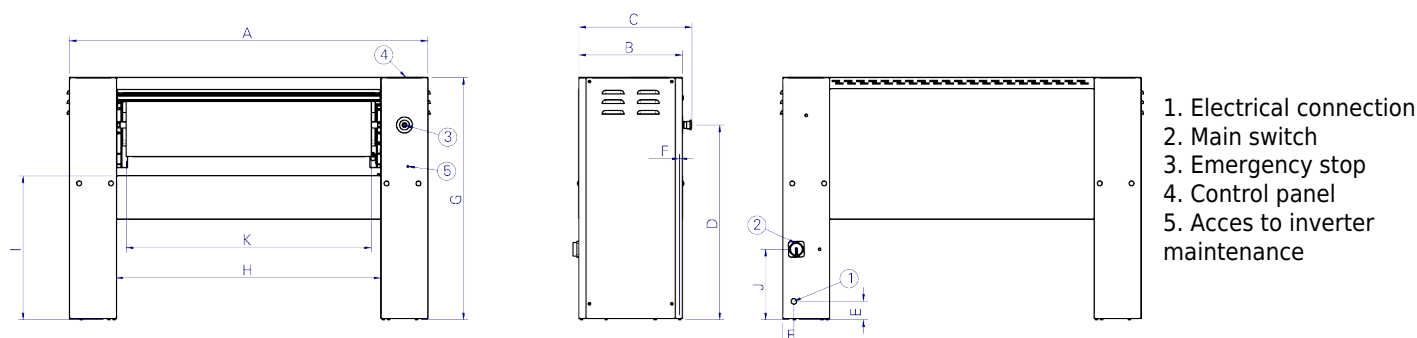

	A	B	C	D	E	F	G	H	I	J	K
NPR-1025	1.462	423	484	791	75	45	985	1.079	610	287	988

	A	B	C	D	E	F	G	H	I	J	K
NPR-1225	1.662	423	484	791	75	45	985	1.279	610	287	1.198
NPR-1425	1.862	423	484	791	75	45	985	1.479	610	287	1.398
NPR-2025	2.462	423	484	791	75	45	985	2.079	610	287	1.998