



ELECTRONIC CONTROL

NPR models: electronic control.

- Three-digit display.
- Manual control.

NPR ECO-ENERGY models: M control.

- Large display with two lines of text.
- Two control modes: manual and automatic.
 - Automatic ironing speed control.
 - Maintains an optimal temperature.



EFFICIENCY

• **NPR ECO-ENERGY:**

- +33% more productivity.

• **NPR and NPR ECO-ENERGY:**

- High heat retention thanks to the chest insulation.
- Adaptation to different fabric thicknesses.



ROBUSTNESS

- Models with Nomex coating: resistant to high temperatures.
- Grey skinplate and stainless steel panels.
- Wooden feeding table.
- Industrial components, more durable.
- Gas spring located under the chest.
- Klaxon thermostat, greater safety and reliability.



OUTSTANDING FEATURES

- Roll lifting control by pedal or automatic roll lifting control by foot cell detection.
- **NPR models:**
 - Speed control via potentiometer (option).
- **NPR ECO-ENERGY Models:**
 - Large roll contact area with the linen.
 - Mode of operation identical to a flatwork ironer: no roll lifting, more ergonomic.
 - Models equipped with Nomex belts, suction and variable speed inverter, more productivity.
 - Adjustable speed and temperature.




MAINTENANCE

- Easy installation: requires only an electrical connection.
- Easy access on both sides for maintenance.
- Quick and easy dismantling of bearings.
- Thermostat and probe accessible from the rear without removing the heating plate.



OTHERS

- Front feeding and return.
- Roll Ø 250 mm. Working widths: 1.400, 2.000mm.
- Electric heating.
- CE certification.

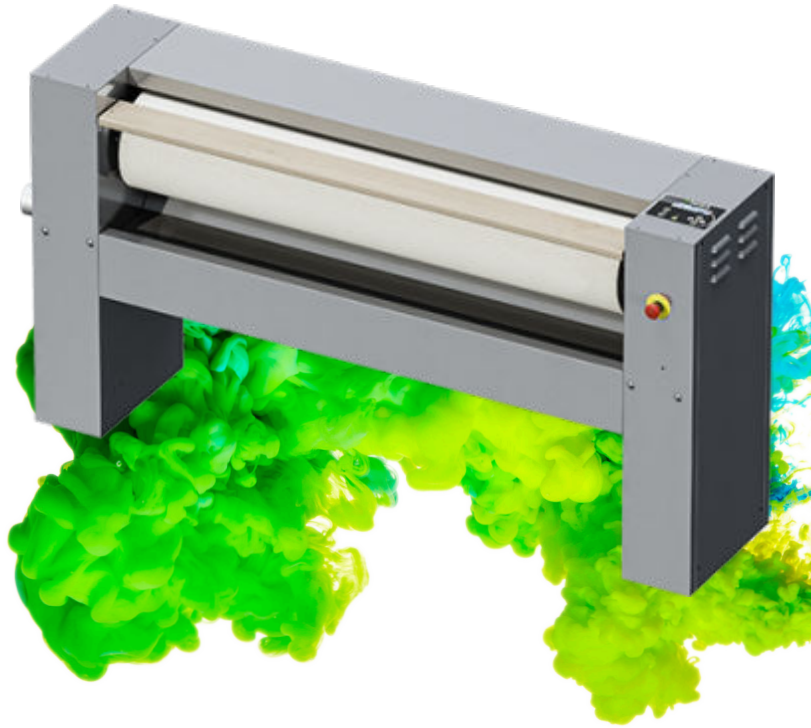


OPTIONS

- 230V 3 + N + T 50/60Hz (250mm)
- 440V 3 60Hz No N (marine)

GENERAL DETAILS	UNIT.	NPR-2025 ECO-ENERGY
Theoretical production 20-25% humidity	Kg/h	52
	Lb/H	114,64
Roll Ø	mm	250
	Inch	9,84
Working width	mm	2.000
	Inch	78,74
Working speed	m/min	1,5-6
	ft/mn	4,9 - 19,6
SC speed control (option)	m/min	--
	ft/mn	--
Nomex quality coating	-	YES
Electronic control	-	YES
Chest motion	-	NO
POWER		
Heating power	Kw	12
Roll motor power	Kw	0,18
Fan motor power	Kw	0,12
Total electric power	Kw	12,3
CONNEXIONS		
Tension 230 V I + N + T	n° x mm²/A	N/A
	n° x AWG/A	N/A
Tension 230 V III + T	n° x mm²/A	4 x 10 / 40A
	n° x AWG/A	4 x 7 / 40A
Tension 400 V III + N + T	n° x mm²/A	5 x 4 / 20A
	n° x AWG/A	5 x 11 / 20A
DIMENSIONS		
Net / gross width	mm	2.523 / 2.490
	inch	97 / 98
Net / gross depth	mm	484 / 540
	inch	19 / 21
Net / gross height	mm	985 / 1.130
	inch	39 / 44
Net / gross weight	Kg	184 / 204
	Lb	406 / 450
Net / gross volume	m³	1,20 / 1,52
	ft³	42,48 / 53,66
OTHERS		
No. Fume outlet	Nº	1
Ø Fume outlet	mm	80
	inch	3,15
Air flow	m³/h	500
	cfm	294
Noise Level	dB	60

* 20%-25% theoretical production

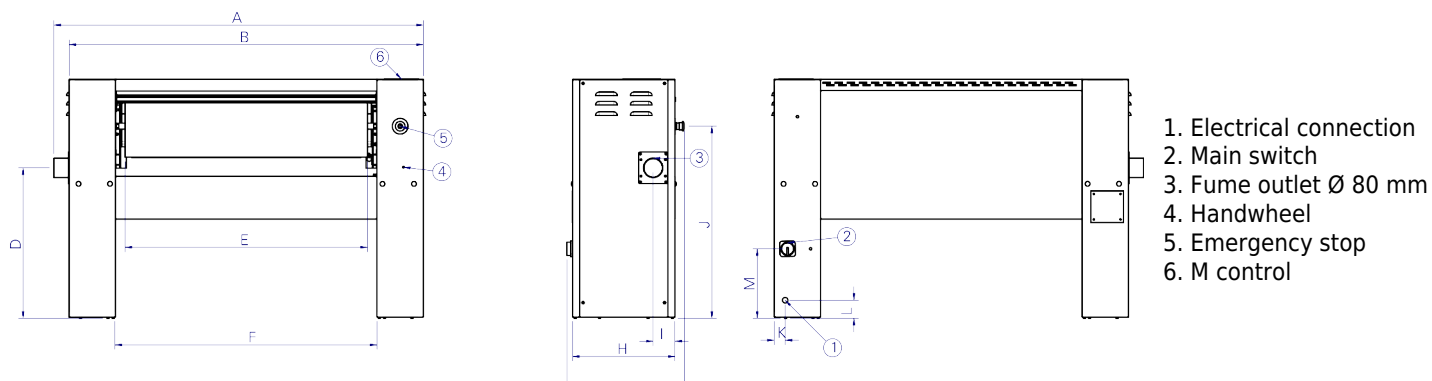

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

	A	B	C	D	E	F	G	H	I	J	K	L	M
NPR-1425 ECO-ENERGY	1.923	1.862	985	610	1.400	1.480	484	423	91	791	45	75	287
NPR-2025 ECO-ENERGY	2.523	2.462	985	610	2.000	2.080	484	423	91	791	45	75	287