



ELECTRONIC CONTROL

Selection between 4 temperatures.
Preset ironing speeds, not adjustable.
No display.



EFFICIENCY

Acoustic comfort: 50-60 dB max.
Minimum space requirement: space saving, suitable for small spaces.
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels.



ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on ECO-ENERGY).
Panels in grey Skinplate and stainless steel.
Wooden feeding board.
Industrial components, more durable.



OUTSTANDING FEATURES

Large roll contact area with the linen.
Roll lifting control by pedal or automatic roll lifting control by foot cell detection.
Two available models:
• **Standard**: roll with cotton polyester coating.
• **Nomex**: roll with Nomex coating.




MAINTENANCE

Easy installation: requires only an electrical connection.
Easy access on both sides for maintenance.
Quick and easy dismantling of bearings.



OTHERS


Front feed and return.
Roll ø 180 mm.
Working widths: 1.000mm and 1.200mm.
Electric heating.
CE certification

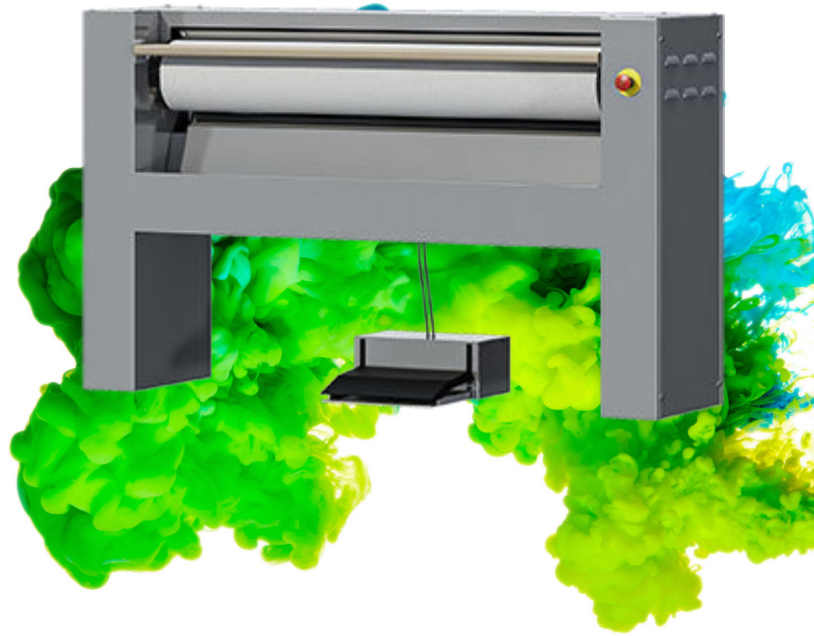

OPTIONS

- Speed control (except ECO-ENERGY)
- 230V 1 + N 50Hz (except 250mm and ECO-ENERGY)
- 230V 1 + N 60Hz (except 250mm and ECO-ENERGY)
- 230V 3 + N + T 50Hz (250mm)

GENERAL DETAILS		UNIT.	PR-1218 NOMEX
Theoretical production: 20-25 humidity		Kg/h	20
		Lb/h	44,09
Roll Ø		mm	180
		inch	7,09
Working width		mm	1.200
		inch	47,24
Working speed		m/min	2.02
		ft/mn	6,62
Electronic control		-	YES
Chest motion		-	Manual
POWER			
Heating power		Kw	4
Roll motor power		Kw	0,03
Total electric power		Kw	4,03
CONNEXIONS			
Tension 230 V I + N + T	nº x mm²/A		3 x 4 / 20A
	nº x AWG/A		3 x 11 / 20A
Tension 230 V III + T	nº x mm²/A		-
	nº x AWG/A		-
Tension 400 V III + N + T	nº x mm²/A		-
	nº x AWG/A		-
DIMENSIONS			
Net / gross width	mm		1.570 / 1.690
	inch		62 / 67
Net / gross depth	mm		438 / 540
	inch		17,24 / 21,26
Net / gross height	mm		952 / 1.130
	inch		37,48 / 44,49
Net / gross weight	Kg		90 / 110
	Lb		198,42 / 242,51
Net / gross volume	m³		0,65 / 1,03
	ft³		22,95 / 36,37
OTHERS			
No. Fume outlet	Nº		-
Ø Fume outlet	mm		-
	inch		-
Air flow	m³/h		-
	cfm		-
Noise Level	dB		55

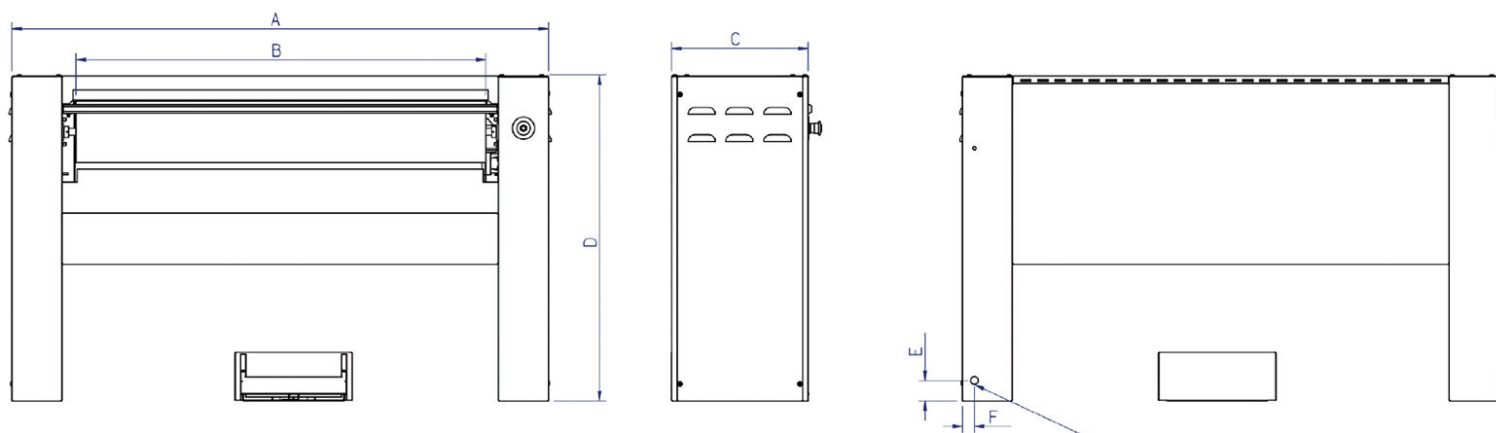

1. Electrical connection

	A	B	C	D	E	F
PR-1018 NOMEX	1.694	1.447	689	1.354	68	785
PR-1218 NOMEX	1.694	1.447	689	1.354	68	785