

### FEATURES

- Dries, irons and folds linen lengthwise.
- Folding type: longitudinal.
- Can be equipped with an automatic feeder (optional), allowing a single operator to manage the feeding of items.
- Maximum output up to 290 kg/h.\*
- Adjustable ironing speed up to 18 m/min.\*
- Maximum temperature: 165°C.
- Automatic ironing speed control.
- Automatic cooling of the ironing roller.
- Available in one or two work lanes.
- Intuitive and programmable 7" touchscreen.
- Fume extraction system with automatic fan cleaning.
- Customisable with different accessories.

Key options:

SALIDA POSTERIOR / Rear exit



Recogedor post. + bypass (2/4 vías)  
Rear collector + bypass (2/4 lanes)



SMARTY  
Plegadora prend. pequeñas  
Small garment folder





### OPTIONS

- Vacuum belts to help linen feeding
- Automatic 1 lane clamp feeder (needs option of vacuum feeding belts)
- Rear output with table (SP600 H=610 mm, SP800 H=540 mm. Bypass option required)
- Crossfolder CPL-CROSS 260 with stacker
- Crossfolder CPL-CROSS 330 with stacker
- Rear output with motorised table (H=870 mm. Bypass option required)
- Small pieces back collector: 2 lanes for SP (it needs rear exit + bypass option)
- Small pieces back collector: 4 lanes for SP (it needs rear exit + bypass option)
- By pass for rear exit
- Double air pressure for thick linen
- Linen rejection system (dirty or torn)
- Different voltage from 400V 3~ +N 50 Hz
- Maritime packing for SP

| GENERAL DATA                                      | UNIT. | SP800-2600    |
|---------------------------------------------------|-------|---------------|
| Theoretical production elec/steam                 | Kg/h  | 140-175       |
| Theoretical production gas heating*               | Kg/h  | 140-175       |
| Theoretical production radiant gas burner (+20%)* | Kg/h  | 168-210       |
| Ø Roll                                            | mm    | 800           |
| Working width                                     | mm    | 2.600         |
| Height floor-feeding                              | mm    | 1.050         |
| Working speed                                     | m/min | 3-14          |
| Control type                                      | -     | Digital       |
| No. of programs                                   | Nº.   | 20            |
| MAIN FUNCTIONS                                    |       |               |
| Drying                                            | -     | YES           |
| Ironing                                           | -     | YES           |
| Longitudinal folding                              | -     | YES           |
| Cross folding                                     | -     | NO            |
| Lateral stacking (Roll-Off or compact stacker)    | -     | NO            |
| FOLDING                                           |       |               |
| 1 lane - lengthfold                               | Nº.   | 1-2           |
| 1 lane - crossfold                                | Nº    | NO            |
| 2 lanes - lengthfold                              | Nº    | 1-2           |
| 2 lanes - crossfold                               | Nº    | NO            |
| 4 lanes - lengthfold                              | Nº    | NO            |
| 4+ lanes - folding                                | Nº    | NO            |
| POWER                                             |       |               |
| Electric model - Consumption                      | A     | 104           |
| Electric model - Heating power                    | kW    | 72            |
| Electric model - Total electrical power           | kW    | 74,2          |
| Steam model - Consumption                         | Kg/h  | 150           |
| Steam model - Power (max 12 bar)                  | kW    | 85            |
| Steam model - Total electrical power              | kW    | 2,2           |
| Liquefied gas (LPG) model - Consumption           | m³/h  | 3,40          |
| Liquefied gas (LPG) model - Power                 | kW    | 91,70         |
| Natural gas (NG) model - Consumption              | m³/h  | 9,20          |
| Natural gas (NG) model - Power                    | kW    | 86,95         |
| Gas LPG / NG model - Total electrical power       | kW    | 2,2           |
| CONNECTIONS                                       |       |               |
| Ø Gas inlet                                       | BSP   | 1"            |
| Ø Steam inlet (12 bar max.)                       | BSP   | 1"            |
| Ø Condensed (steam models)                        | BSP   | 1/2"          |
| Ø Air inlet                                       | mm    | 12            |
| DIMENSIONS                                        |       |               |
| Net width / gross width                           | mm    | 3.790 / 3.950 |
| Net depth / gross depth                           | mm    | 1.770 / 2.220 |
| Net height / gross height                         | mm    | 2.200 / 2.140 |
| Net weight / gross weight                         | Kg    | 2.535 / 2.885 |
| Volume                                            | m³    | 14,76 / 18,77 |
| OTHERS                                            |       |               |
| Exhaust outlet                                    | Nº    | 2             |
| Exhaust outlet Ø                                  | mm    | 160           |
| Air extraction flow rate                          | m³/h  | 2 x 1400      |
| Air consumption (6.5 bar)                         | NI/h  | 9.000         |
| Noise level                                       | dB    | <80           |

\* 50% residual moisture, 140gr/m² cotton, 100% roller utilization. Gas with atmospheric burner not available on 1000mm models.

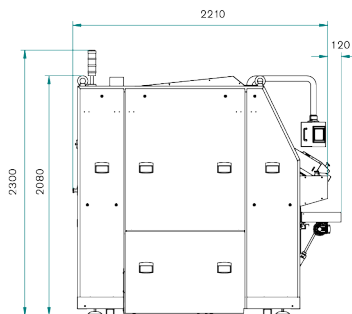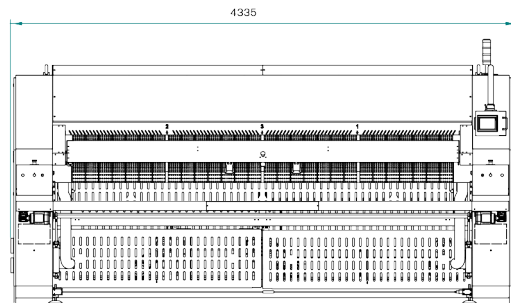

#### Standard:

- ST 1 - Warning light
- ST 2 - Emergency stop
- ST 3 - Lifting eye bolts (crane)
- ST 4 - Exhaust outlet connection

#### Options:

- OP 2 - Vacuum feed belts
- OP 3 - Feeder: clips
- OP 31 - Feeder: alignment guides
- OP 4 - Linen reject (button, for SPE / SP models)
- OP 6 - Small pieces back collector (2 or 4 lanes)
- NO - Not available in the SP / S range

