



TUMBLE DRYERS


2026

Tumble dryers

The wide range of Domus tumble dryers is suitable for all types of sectors and businesses, thanks to its versatile models and numerous features.

The same dryer can be installed in an industrial laundry (hotels or residences) or be prepared for self-service laundries.

Their efficient and technologically advanced features make them ideal for highly profitable laundries that take energy saving into account.

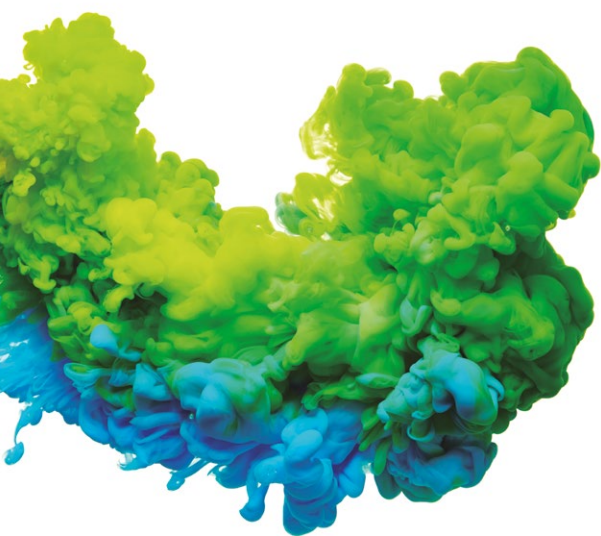

Single drum

**DOMUS ECO-ENERGY** | The most efficient

CONTROL TYPE	HEATING	CAPACITY								
		11-12 kg	14-15 kg	17-18 kg	22-24 kg	28-31 kg	33-37 kg	45-50 kg	60-67 kg	75-83 kg
MICROPR. TOUCH II	Electric, gas, steam	DTT-11 ECO-ENERGY	DTT-14 ECO-ENERGY	DTT-18 ECO-ENERGY	DTT-22 ECO-ENERGY	DTT-28 ECO-ENERGY	DTT-35 ECO-ENERGY	DTT-45 ECO-ENERGY	DTT-60 ECO-ENERGY	DTT-80 ECO-ENERGY

**DOMUS DYNAMIC**

CONTROL TYPE	HEATING	CAPACITY								
		11-12 kg	14-15 kg	17-18 kg	22-24 kg	28-31 kg	33-37 kg	45-50 kg	60-67 kg	75-83 kg
MICROPR. TOUCH II	Electric, gas, steam	DTT-11	DTT-14	DTT-18	DTT-22	DTT-28	DTT-35	DTT-45	DTT-60	DTT-80

**DOMUS COMFORT**

CONTROL TYPE	HEATING	CAPACITY								
		11-12 kg	14-15 kg	17-18 kg	22-24 kg	28-31 kg	33-37 kg	45-50 kg	60-67 kg	75-83 kg
ELECTRONIC CTRL M	Electric, gas, steam	DTM-11	DTM-14	DTM-18	DTM-22	DTM-28	DTM-35	DTM-45	DTM-60	DTM-80

**DOMUS ESSENTIAL**

CONTROL TYPE	HEATING	CAPACITY								
		11-12 kg	14-15 kg	17-18 kg	22-24 kg	28-31 kg	33-37 kg	45-50 kg	60-67 kg	75-83 kg
ELECTRONIC CTRL M	Electric, gas	DLM-11	DLM-14	DLM-18	DLM-22	DLM-28	DLM-35			

NEW Heat Pump with inverter (HPi)**DOMUS ECO-ENERGY** | The most EFFICIENT range

CONTROL TYPE	HEATING	CAPACITY			
		11-12 kg	14-15 kg	17-18 kg	22-24 kg
MICROPR. TOUCH II	Heat pump	DTT-11 HPi ECO-ENERGY	DTT-14 HPi ECO-ENERGY	DTT-18 HPi ECO-ENERGY	DTT-22 HPi ECO-ENERGY

New

Double drum: STACK

**DOMUS DYNAMIC XP**

CONTROL TYPE	HEATING	CAPACITY			
		11-12 kg	14-15 kg	17-18 kg	22-24 kg
TOUCH II microprocessor Programmable control	Electric, gas	DTT2-11 XP	DTT2-14 XP	DTT2-18 XP	DTT2-22 XP G

New

**DOMUS COMFORT XP**

CONTROL TYPE	HEATING	CAPACITY			
		11-12 kg	14-15 kg	17-18 kg	22-24 kg
Electronic control M	Electric, gas	DTM2-11 XP	DTM2-14 XP	DTM2-18 XP	DTM2-22 XP G

New

**DOMUS ESSENTIAL XP**

CONTROL TYPE	HEATING	CAPACITY			
		11-12 kg	14-15 kg	17-18 kg	22-24 kg
Electronic control M	Electric, gas	DLM2-1 XP	DLM2-14 XP	DLM2-18 XP	DLM2-22 XP G

New

NOTE: All models can be easily converted to coin mode, with a coin kit, token kit or for central pay, except 45kg to 80kg models and ECO-ENERGY range.

One drum



DTT ECOENERGY



- ✓ **TOUCH II:** easy-to-use microprocessor, fully programmable with a 7" touchscreen.
- ✓ **DOMUSCONNECT:** standard and free IoT connectivity.
- ✓ **AIR RE-CYCLE:** air recovery system for great energy efficiency.
- ✓ **EFFICIENT DRY:** intelligent humidity sensor.
- ✓ Thermal insulation: complete circuit of the airflow.
- ✓ **FULL FLOW:** optimised mixed airflow system.
- ✓ **SFEX:** integrated Fire Extinguishing System.
- ✓ Grey skinplate body, stainless steel look.
- ✓ Big loading door (opening of 180°).
- ✓ Reverse action: standard in all models.
- ✓ Stainless steel drum as standard.
- ✓ **SOFT DRY:** drum with stamped holes.
- ✓ **FULL SCREEN FILTER:** filter drawer with wide surface and improved airflow.
- ✓ **COOL DOWN:** anti-wrinkle at the end of cycle.

OPTIONS:

- + **Sliding door** on big capacity (45-80kg).
- + Front tilt on big capacity (45-80kg).



DTM COMFORT



- ✓ **Programmer M:** time and temperature selection, easy to use and versatile.
- ✓ Grey skinplate body, stainless steel look.
- ✓ Big loading door (opening of 180°).
- ✓ Reverse action: standard in all models.
- ✓ Stainless steel drum as standard.
- ✓ **DOUBLE FLOW:** axial-radial airflow.
- ✓ **SOFT DRY:** drum with stamped holes.
- ✓ **FULL SCREEN FILTER:** filter drawer with wide surface and improved airflow.
- ✓ **COOL DOWN:** anti-wrinkle at the end of cycle.

OPTIONS:

- + **Sliding door** on big capacity (45-80kg).
- + Display for M programmer.



DTT DYNAMIC



- ✓ **TOUCH II:** easy-to-use microprocessor, fully programmable with a 7" touchscreen.
- ✓ **DOMUSCONNECT:** standard and free IoT connectivity.
- ✓ Grey skinplate body, stainless steel look.
- ✓ Big loading door (opening of 180°).
- ✓ Reverse action: standard in all models.
- ✓ Stainless steel drum as standard.
- ✓ **DOUBLE FLOW:** axial-radial airflow.
- ✓ **SOFT DRY:** drum with stamped holes.
- ✓ **FULL SCREEN FILTER:** filter drawer with wide surface and improved airflow.
- ✓ **COOL DOWN:** anti-wrinkle at the end of cycle.

OPTIONS:

- + **Sliding door** on big capacity (45-80kg).
- + Front tilt on big capacity (45-80kg)
- + **EFFICIENT DRY:** the intelligent humidity sensor.
- + **SFEX:** Integrated Fire Extinguishing System.
- + Double door glass.



DLM ESSENTIAL



- ✓ **Programmer M:** time and temperature selection, easy to use and versatile.
- ✓ White painted panels.
- ✓ Big loading door (opening of 180°).
- ✓ Reverse action: standard in all models.
- ✓ **DOUBLE FLOW:** axial-radial airflow.
- ✓ **SOFT DRY:** drum with stamped holes.
- ✓ **COOL DOWN:** anti-wrinkle at the end of cycle.

HEAT PUMP (HPI)



Nuevo

DTT ECOENERGY



- ✓ **TOUCH II:** fully programmable controller with a 7" colour touchscreen.
 - ✓ **DOMUSCONNECT:** standard, free IoT connectivity.
 - ✓ Low energy consumption.
 - ✓ No external air outlet required.
 - ✓ No water supply required for cooling.
 - ✓ Reversible rotation.
 - ✓ Gear motor drive.
 - ✓ Drain pump.
 - ✓ Grey skinplate exterior finish, stainless steel look.
 - ✓ Large loading door (180° opening).
 - ✓ Drums made of AISI 430 stainless steel.
 - ✓ Standard double-glazed door.
 - ✓ EFFICIENT DRY: the smart humidity sensor.
 - ✓ SOFT DRY: perforated drum.
 - ✓ COOL DOWN: anti-crease cooling system at the end of the cycle.
 - ✓ FULL SCREEN FILTER with triple filtration system.
- OPTIONS:**
- + Front and side panels in AISI-304 stainless steel.

STACKED



DTT2 XP DYNAMIC



- ✓ **TOUCH II:** user-friendly, fully programmable microprocessor with a 7-inch
 - ✓ **DOMUSCONNECT:** standard, free IoT connectivity.
 - ✓ Grey skinplate exterior finish, stainless steel look.
 - ✓ Large loading door (180° opening).
 - ✓ Reversible rotation: standard on all models.
 - ✓ **DOUBLE FLOW:** mixed axial-radial airflow.
 - ✓ **SOFT DRY:** perforated drum with recessed holes.
 - ✓ **FULL SCREEN FILTER:** filter with a larger surface area and improved airflow.
 - ✓ **COOL DOWN:** anti-crease cooling system at the end of the cycle.
- OPTIONS:**
- + EFFICIENT DRY: humidity control.
 - + SFEX: fire prevention system.
 - + Double-glazed door.



New

DTM2 XP COMFORT



- ✓ Programmer M: time and temperature selection, easy to use and versatile
 - ✓ Grey skinplate body, stainless steel look.
 - ✓ Big loading door (opening of 180°).
 - ✓ Reverse action: standard in all models.
 - ✓ **FULL SCREEN FILTER:** filter drawer with wide surface and improved airflow.
 - ✓ **DOUBLE FLOW:** axial-radial airflow.
 - ✓ **SOFT DRY:** drum with stamped holes.
 - ✓ **COOL DOWN:** anti-wrinkle at the end of cycle.
- OPTIONS:**
- + Display for M programmer.



New

DLM2 XP ESSENTIAL



- ✓ Programmer M: time and temperature selection, easy to use and versatile.
- ✓ White painted panels. Galvanized drum.
- ✓ Big loading door (opening of 180°).
- ✓ Reverse action: standard in all models.
- ✓ **FULL SCREEN FILTER:** filter drawer with wide surface and improved airflow.
- ✓ **DOUBLE FLOW:** axial-radial airflow.
- ✓ **SOFT DRY:** drum with stamped holes.
- ✓ **COOL DOWN:** anti-wrinkle at the end of cycle.

ECOENERGY



TOUCH II

- ✓ **TOUCH II:** easy-to-use microprocessor, fully programmable with a 7" touchscreen.
- ✓ **DOMUSCONNECT:** standard and free IoT connectivity (models with TOUCH II).
- ✓ **Telemetry:** detailed data with dynamic and customisable graphs.
- ✓ Multilingual interface: choose your preferred language from a wide and constantly expanding selection.
- ✓ USB port: configure, update, and analyse machines without internet connection.
- ✓ On-screen videos: add your logo, video advertisements or instructions for use. Especially useful for self-service.



VERSATILITY

- ✓ Make to order: customization. Possibility to customize the machines from factory with the available options.
- ✓ Wet Cleaning: possibility to create different phases per program with its customized parameters.
- ✓ Efficient Dry
- ✓ OPL < > Self-service laundry.
Standard OPL model easily transformable to coin laundry.



OUTSTANDING FEATURES

- ✓ **Reversing drum action** as standard.
- ✓ **Stainless steel drum** as standard.
- ✓ Frequency inverter as standard.
- ✓ SOFT DRY as standard.



MAINTENANCE

- ✓ Hinged panel: easy and ergonomic access to control panel parts.
- ✓ Easy access to parts for reparability: dryers are designed to offer an easier maintenance and repair.
- ✓ Technical menu: machine monitoring, machine error warning, management for telemetry and statistics. Remote desk and data recovery for technicians and maintenance, software update, etc.



ERGONOMICS

- ✓ Drawer as fluff filter, made of stainless steel.
- ✓ Large door diameters: very useful for loading and unloading.
- ✓ Ideal door height for ergonomic opening.
- ✓ Adjustable door opening direction (models 11 to 35 kg)
- ✓ Reversible door: can be ordered with the machine order.

OPTIONS:

- + Sliding door in 45 to 80 kg models. Automatic or manual operation.



EFFICIENCY



- ✓ New **heat pump (HPi) dryers**, the most efficient range.
- ✓ EFFICIENT DRY: intelligent humidity control system with temperature control at the drum entrance.
- ✓ AIR RE-CYCLE: efficient air recirculation system. Shorter drying times, lower energy consumption.
- ✓ FULL FLOW: optimised mixed airflow system.
- ✓ DOUBLE FLOW: Axial-radial airflow.
- ✓ Big fluff filter.
- ✓ Thermal insulation.

OPTIONS:



- + **LEMS by Onnera**: new system to collect laundry consumption in real time.



CONNECTIVITY

- ✓ **DOMUSCONNECT**: standard and free IoT connectivity. Machine monitoring, machine error warning, management for telemetry and statistics, remote desk and data recovery for technicians and maintenance, software update, etc.
- ✓ **Management for laundries**: OPL and COIN. Our Domus IoT solution allows you to manage your laundry business.
- ✓ **Remote payment**: App for payments, cashless payment by scanning a QR code, promotions and machine booking.



DOMUSCONNECT
ANYTIME, ANYWHERE

TOUCH II

The TOUCH II includes many features based on achieving more efficiency, versatility and connectivity.

User friendly and totally programmable microprocessor

- ✓ 7" touchscreen display.
- ✓ Create an unlimited number of programmes.
- ✓ Language selection.
- ✓ Multiple customisation options.
- ✓ Supports IoT connectivity, allowing you to monitor the machine and its performance metrics from anywhere.


Videos on display

Ads, instructions
(useful for coin laundries).



Multilingual interface

Choose your preferred language to display on the TOUCH II screen from a wide and constantly expanding selection.

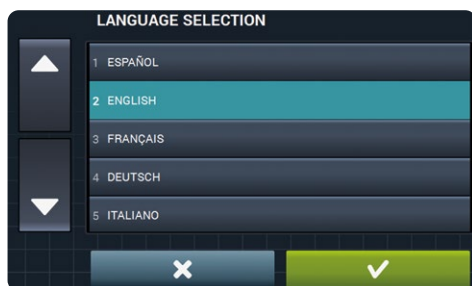

DOMUSCONNECT:

Maximum efficiency and real-time control

Discover the power of IoT connectivity, integrated for free in all machines with TOUCH II via Ethernet, for advanced and efficient management.

- ✓ Monitor telemetry and statistics in real time.
- ✓ Optimise the performance of your equipment.
- ✓ Ensuring MAXIMUM HYGIENE.
- ✓ Receive remote technical support.
- ✓ Update the software and much more.



USB port


If you don't have an internet connection in your laundry, the USB port allows you to configure, update, and analyse the machines via this connection by downloading and uploading data.





EFFICIENCY

At Domus, efficiency is more than a feature: it is a design principle. Our dryers are engineered to deliver outstanding drying performance while reducing energy consumption, helping businesses lower operating costs with every cycle.

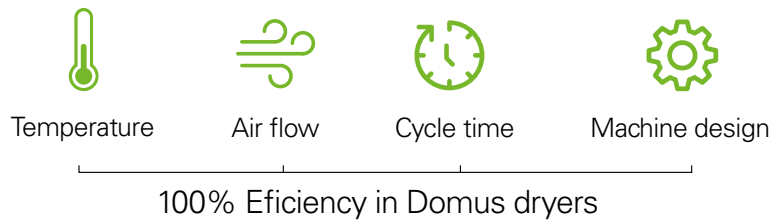

NEW HEAT PUMP DRYER (HPI)

Maximum efficiency, minimum energy consumption. Domus heat pump dryers recover and reuse the heat generated during the drying process, delivering significant energy savings on every cycle.



Compared with the equivalent 18 kg electric model, the heat pump version achieves:

up to -79%

lower installed power
(3,82kW vs 18,67kW)


up to -65,9%

lower energy consumption
(0.45 kWh/l vs 1.32 kWh/l)



In a laundry, the machines are the visible part of an iceberg.

At Domus we pay attention to the iceberg part that cannot be seen, to optimize the expenses during the whole Life Cycle Cost.

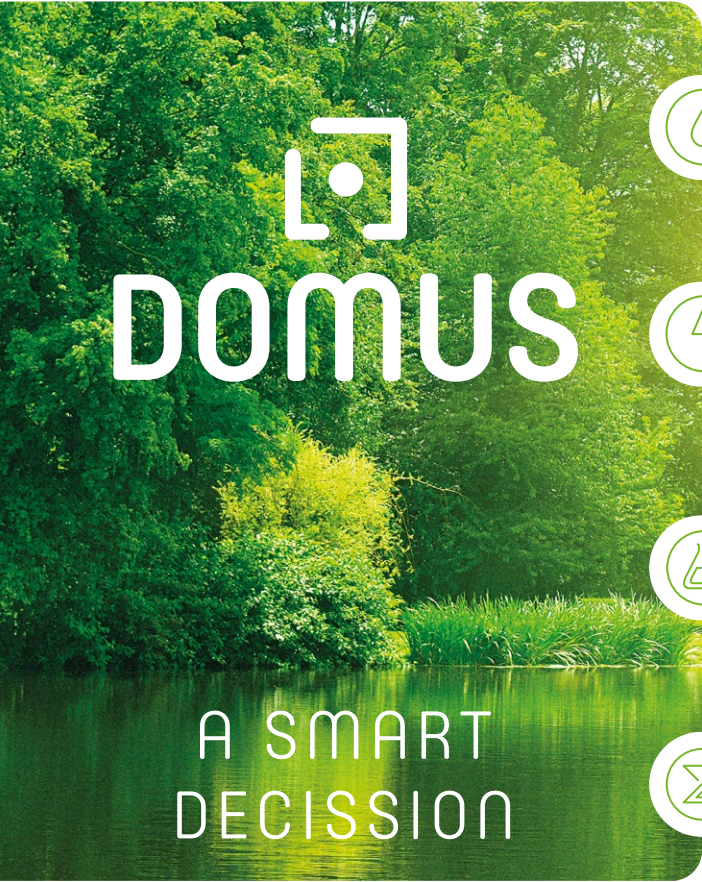

DOMUS

A SMART
DECISSION



WATER

We design our systems to ensure efficient water use, avoiding unnecessary waste.



ENERGY

Our machines are optimised to deliver greater energy savings and maximise laundry efficiency.



CHEMICALS

Our washers and barrier machines are engineered with features that guarantee the most accurate and efficient use of chemicals.




TIME

We streamline process times, a key factor in any laundry, increasing both efficiency and business profitability.

Example of a standard laundry with 50% flat linen and 50% towels, over the first **10 years of operation**.

8%


Investment

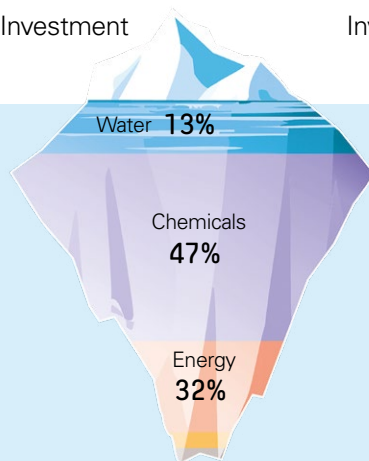

Washing

7%


Investment

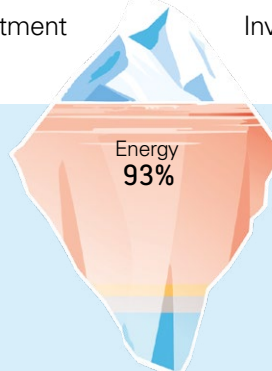

Drying

19%

Investment



Ironing

CONNECTIVITY


All Domus machines with TOUCH II come with IoT connectivity as standard and free of charge, enabling full remote management to improve efficiency, control, and business operations.

DOMUSCONNECT (IoT): the solution for your laundry

The Internet of Things (IoT) connects everyday objects to the internet, allowing real-time remote control and process optimisation.

DOMUSCONNECT is a free laundry management platform that takes IoT to its full potential, transforming the operations of your OPL or self-service laundry.

With this platform, you can increase efficiency, reduce costs, and enhance your customers' experience from anywhere.

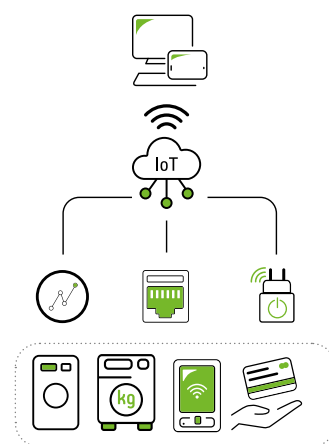

Main features of DOMUSCONNECT



Accessible from any device.

Manage your laundry from a computer, tablet, or smartphone.



Free updates.

Receive regular new features to keep your business at the forefront.




Highly secure.

Advanced security ensures the integrity and confidentiality of your data at all times.



Available in multiple languages.

Expanding continuously to suit your needs.

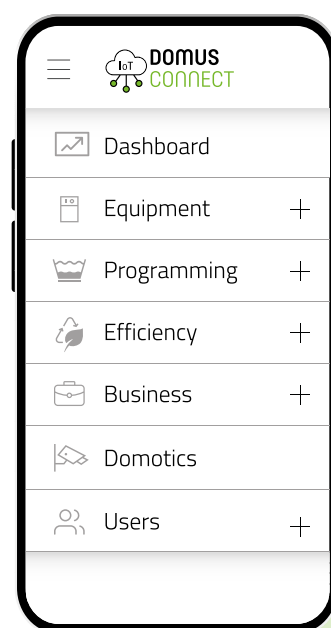

What are the benefits for each profile?



As an **owner**, you can:

- Manage your business remotely, avoiding unnecessary travel.
- Use an intuitive interface to streamline operations.
- Access production reports, cycles, consumption, and revenue data.
- Ensure process control for washing and drying.
- Guarantee hygiene, disinfection, and quality in every cycle.



For your self-service customer, they can:

- Make quick and secure payments via card, tokens, or App.
- Enjoy personalised promotions.
- Check machine status in real time, avoiding waiting times.
- Operate with an intuitive, user-friendly interface.



For service technicians, they can:

- Provide remote assistance to minimise on-site visits.
- Access precise data via the new telemetry system to improve operations.
- Perform remote software updates to keep machines up-to-date.



For chemical suppliers, they can:

- Manage and create washing and drying programmes online.
- Control chemical dosing via RS-485.
- Monitor executed programmes in real time.



As a distributor, you can:

- Leverage the platform to support new business ventures, manage leasing, maintenance contracts, and self-service setups.
- Access detailed databases of installed machines, geographical distribution, and models for efficient management.



ECOSMART LAUNDRY

by DOMUS

The laundry of the future has already arrived.


Domus latest generation, high-performance and connected equipment allows you to manage and monitor resource consumption in real time thanks to cutting-edge technology. Ideal for any type of business and sector.



Add dryers with AIR RECYCLE and EFFICIENT DRY


By adding Domus dryers to your **ECOSMART LAUNDRY**, you improve the efficiency and sustainability of your business. With innovations such as AIR RE-CYCLE and EFFICIENT DRY, each cycle is optimized to save energy and reduce drying times.





LEMS by Onnera - Total control of consumption

With the new LEMS pulse concentrator and DOMUSCONNECT (IoT), you can retrieve all the data and analyze the efficiency of your dryers and other machines of your industrial laundry.



DOMUSCONNECT

The data collected by LEMS, added to other metrics and values of your laundry, are integrated into the DOMUSCONNECT platform, allowing you to monitor and control your business live and obtain detailed management, hygiene and efficiency reports.





VERSATILITY

To adapt to the needs of the different businesses.

OPL <> Self-Service

Easy transformation from OPL to self-service, with various payment options available (see page 17).

EFFICIENT DRY

Intelligent humidity control, which adapts the drum rotation speed to the humidity level at each drying phase (standard in ECO-ENERGY, optional in DYNAMIC).

Wet Cleaning[®]

The best dryer for Wet Cleaning

- ✓ Fully programmable control: possibility of programming in phases.
- ✓ Precise control of inlet and outlet temperatures.
- ✓ Exact programming of humidity.
- ✓ Adjustable drum speed.

Customization

Possibility to customise the machine from factory with the available options.



Payment systems

Domus offers you maximum flexibility with three payment systems that can be combined.

1 Payment with: DOMUS LAUNDRY KIOSK

Optimise your laundry with contactless payments and remote control. Provide convenience and security for your customers while managing pricing and promotions from anywhere with DOMUSCONNECT. Check availability.

-  Available in 12' and 32' screens.
-  Allows payments by card or smart device (NFC).
-  Minimal fees.
-  High compatibility and easy to install.
-  Very intuitive and quick to use.



2 Payment via App: DOMUS LAUNDRY

Allows remote machine reservation and payment, helping to build customer loyalty with promotional offers.

3 Payment with: COIN / TOKEN

Washers and dryers can include coin/token payment systems in various currencies.





ERGONOMICS

Opening sense of the door adjustable on site


Opening sense can be easily changed in models 11 to 36 kg. It can also be ordered from factory.

Biggest door diameters

Helpful for loading and unloading.

Big fluff filter

Drawer with stainless steel grid, easy to open and clean.

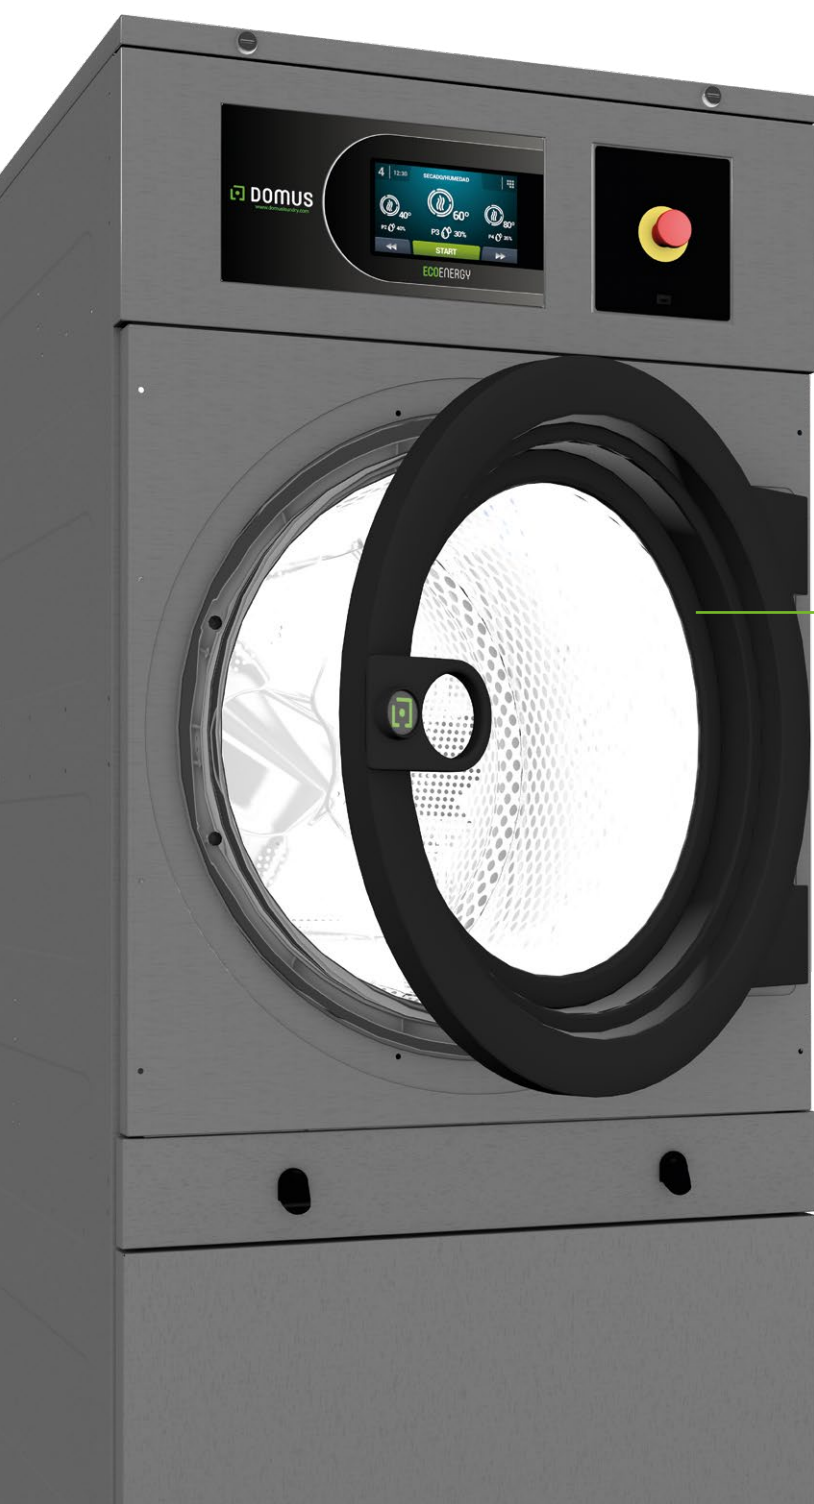

We take care of you as well as your clothes and your business.


Front tilt system

In DTT-45 to 80.

Sliding door

for an easy unloading and loading operation. Automatic and manual options.





OUTSTANDING FEATURES

Reversing drum action

As standard.

Stainless steel drum

As standard except
ESSENTIAL range.

Frequency inverter

As standard.



SOFT DRY

Stamped drum holes, to
lengthen the linen lifetime.



MAINTENANCE

One of Domus concerns is to make life easier for our clients. That includes offering quality equipment and parts of reputed brands, which demand little maintenance.



Easy access to parts.

Dryers are designed to offer an easy maintenance and reparability.

Technical menu

Machine monitoring, machine error warning, management for telemetry and statistics. Remote desk and data recovery for technicians and maintenance, software update, etc.

Hinged panel

Easy and ergonomic access to control panel parts.

Equivalent parts

Most key parts are the same for all models (contactors, electronic devices, gear...).




TECHNICAL DATA

SINGLE POCKET		DTT/DTM/ DLM-11	DTT/DTM/ DLM-14	DTT/DTM/ DLM-18	DTT/DTM/ DLM-22	DTT/DTM/ DLM-28	DTT/DTM/ DLM-35	DTT/DTM- 45	DTT/DTM- 60	DTT/DTM- 80
CAPACITY & DRUM										
Capacity 1/18	Kg	11,7	15	18,3	24,4	30,6	36,7	50	66,7	83,3
Capacity 1/20	Kg	10,5	13,5	16,5	22,0	27,5	33	45	60	75
Ø Drum	mm	750	750	750	835	947	947	1.225	1.225	1.225
Drum length	mm	475	610	746	800	780	936	760	1.020	1.252
Drum volume	l	210	270	330	440	550	660	900	1.200	1.500
Ø Door hole	mm	574	574	574	574	802	802	802	802	802
Door center height	mm	976	976	976	1.030	1.040	1.040	1.275	1.275	1.275
Height from floor to bottom of door	mm	618	618	618	672	578	578	813	813	813
ELECTRIC HEATING										
Evaporation capacity ECO-ENERGY	L/h	11	14,5	14,9	20	26,8	31,1	45	64	68,2
Evaporation capacity DYNAMIC-COMFORT-ESSENTIAL	L/h	9,3	13,5	14,10	17	26,1	31,1	40,2	60,2	64
Hourly output ECO-ENERGY	Kg/h	21,7	29	30	40	51,6	63,9	90	128,6	136,4
Hourly output DYNAMIC-COMFORT-ESSENTIAL	Kg/h	20,3	26,9	28,3	34	48,4	60	80,4	120	128,6
Installed heating power	kW	12	18	18	24	30	36	54	72	72
Installed elect. power ECO-ENERGY	kW	12,97	18,97	18,97	25,17	31,35	37,35	57	75,35	75,75
Installed electrical power DYNAMIC-COMFORT-ESSENTIAL	kW	12,67	18,67	18,67	24,97	31,15	37,15	55,9	74,25	74,65
Drum motor power	kW	0,37	0,37	0,37	0,37	0,55	0,55	0,75	1,10	1,50
GAS HEATING										
Evaporation capacity ECO-ENERGY	L/h	14,95	15,6	16,8	22,3	31,8	34,7	48,2	72	93,8
Evaporation capacity DYNAMIC-COMFORT-ESSENTIAL	L/h	14,5	15,4	16,3	20	30,9	32,1	42,5	65,8	86,5
Hourly output ECO-ENERGY	Kg/h	30	31,2	33,4	44,6	61,1	73,3	96,4	144	187,5
Hourly output DYNAMIC-COMFORT-ESSENTIAL	Kg/h	29	30,25	32,6	40	59,3	63,9	84,4	128,6	173,1
Installed gas heating power	kcal/h	17627	17627	17627	26655	35254	35254	51591	77386	103181
Installed gas heating power	kW	20,5	20,5	20,5	31	41	41	60	90	120
Installed electrical power ECO-ENERGY	kW	0,97	0,97	0,97	1,17	1,35	1,35	3	3,35	3,75
Installed electrical power DYNAMIC-COMFORT-ESSENTIAL	kW	0,67	0,67	0,67	0,97	1,15	1,15	1,9	2,25	2,65
STEAM HEATING										
Installed steam heating power	kW	30	30	30	49,2	50,1	50,1	91	128	128
Installed elect. power ECO-ENERGY	kW	0,97	0,97	0,97	1,17	1,35	1,35	3	3,35	3,75
Installed electrical power DYNAMIC-COMFORT-ESSENTIAL	kW	0,67	0,67	0,67	0,97	1,15	1,15	1,9	2,25	2,65
VENTILATION										
Fan motor power ECO-ENERGY	kW	0,55	0,55	0,55	0,75	0,75	0,75	2,2	2,2	2,2
Fan motor power DYNAMIC-COMFORT-ESSENTIAL	kW	0,25	0,25	0,25	0,55	0,55	0,55	1,1	1,1	1,1
Ø Fume exhaust	mm	200	200	200	200	200	200	300	300	300
HEAT EMISSION										
Max. total heat emission ECO-ENERGY	kW	1	1,4	1,4	1,9	2,4	2,9	3,8	5	5
Max. total heat emission DYNAMIC-COMFORT-ESSENTIAL	kW	1,2	1,8	1,8	2,4	3	3,6	4,9	6,5	6,5
Max. heat emission ECO-ENERGY	kW	0,6	0,9	0,9	1,2	1,5	1,8	1,1	1,4	1,4
Max. heat emission DYNAMIC-COMFORT-ESSENTIAL	kW	0,8	1,3	1,3	1,7	2,1	2,5	2,2	2,9	2,9
NET / GROSS DIMENSIONS										
Net / gross width	mm	785 / 865	785 / 865	785 / 865	890 / 970	985 / 1.065	985 / 1.065	1.270 / 1.330	1.270 / 1.330	1.270 / 1.330
Net / gross depth	mm	855 / 940	989 / 1.074	1.125 / 1.210	1.255 / 1.345	1.054 / 1.154	1.210 / 1.310	1.106 / 1.185	1.366 / 1.455	1.598 / 1.705
Net / gross height (*without heating)	mm	1.694 / 1.840	1.694 / 1.840	1.694 / 1.840	1.812 / 1.940	1.975 / 2.080	1.975 / 2.080	2.380 /*2.200	2.380 /*2.200	2.380 /*2.200
Net / gross weight	Kg	172 / 180	180 / 190	187 / 200	210 / 230	230 / 260	260 / 285	395 / 430	529 / 575	657 / 715
OTHERS										
Sound level	dB	64	64	64	65	65	65	67	67	67

STACK	UNIT.	DTT2-11 XP/DTM2-11 XP/ DLM2-11 XP	DTT2-14 XP/DTM2-14 XP/ DLM2-14 XP	DTT2 -18 XP/DTM2 -18 XP/ DLM2-18 XP	DTT2-22 XP/DTM2-22 XP/ DLM2-22 XP
CAPACITY & DRUM					
Capacity 1/18 (each drum)	Kg	11,7 x2	15 x2	18,3 x2	24,3 x2
Capacity 1/20 (each drum)	Kg	10,5 x2	13,5 x2	16,5 x2	21,9 x2
Ø Drum	mm	750	750	750	835
Drum length	mm	475	610	746	800
Drum volume	l	210	270	330	440
Ø Door hole	mm	574	574	574	575
Door center height	mm	547 / 1.522	547 / 1.522	547 / 1522	547 / 1.618
Height floor to bottom of door	mm	189 / 1.164	189 / 1.164	189 / 1.164	214 / 1.258
ELECTRIC HEATING					
Evaporation capacity	L/h	27 (13,5 x2)	29 (14,5 x2)	31 (15,5 x2)	-
Hourly output	Kg/h	54 (27 x2)	58 (29 x2)	62 (31 x2)	-
Installed heating power	kW	12 x2	18 x2	18 x2	-
Installed electrical power	kW	31,34	37,34	37,34	-
Drum motor power	kW	0,37 x2	0,37 x2	0,37 x2	0,37 x2
GAS HEATING					
Evaporation capacity	L/h	30,8 (15,4 x2)	31,4 (15,7 x2)	32 (16 x2)	44 (22 x2)
Hourly output	Kg/h	61,6 (30,8 x2)	62,8 (31,4 x2)	64 (32 x2)	88 (44 x2)
Installed gas heating power	kW	20,5 x2	20,5 x2	20,5 x2	30,4 x2
Installed electrical power	kW	1,34	1,34	1,34	1,94
VENTILATION					
Fan motor power	kW	0,25 x2	0,25 x2	0,25 x2	0,55 x2
Ø Fume exhaust	mm	200	200	200	250
HEAT EMISSION					
Maximum total heat emission	kW	3,3	3,3	3,3	5
Max. front heat emission	kW	1,2	1,2	1,2	1,9
NET / GROSS DIMENSIONS					
Width	mm	785 / 865	785 / 865	785 / 865	870 / 950
Depth	mm	1.001 / 1.084	1.135 / 1.218	1.271 / 1.354	1.312 / 1.395
Height	mm	1.994 / 2.126	1.994 / 2.126	1.994 / 2.126	2.118 / 2.250
Weight	Kg	284 / 295	299 / 312	329	374 / 389
OTHERS					
Sound level	dB	64	64	64	69

Heat pump (HPi)*					
		DTT-11 HPi	DTT-14 HPi	DTT-18 HPi	DTT-22HPi
POWER					
Evaporation capacity	L/h	6,2	6,4	7,1	7,5
Hourly production	kg/h	12,3	12,9	14,1	15,0
Installed heating power	kW	2,2	2,2	3,28	3,28
Installed electrical power	kW	2,74	2,74	3,82	3,82
Fan power	kW	0,17	0,17	0,17	0,17
NET / GROSS DIMENSIONS					
Net / gross width	mm	785/865	785/865	785/865	890/970
Net / gross depth	mm	1.040/1.125	1.040/1.125	1.125/1.210	1.255/1.345
Net / gross height	mm	1.694/1.840	1.694/1.840	1.694/1.840	1.812/1.940
Net / gross weight	Kg	644/666	661/683	677/705	728/772
Noise level	dB	61	61	61	61
OTHER DATA					
Exhaust air outlet	-	-	-	-	-
Noise level	dB	61	61	61	61

*This table shows only the key specifications that differ from the standard electric models (p. 22). For the complete specifications, please refer to the technical data sheets.

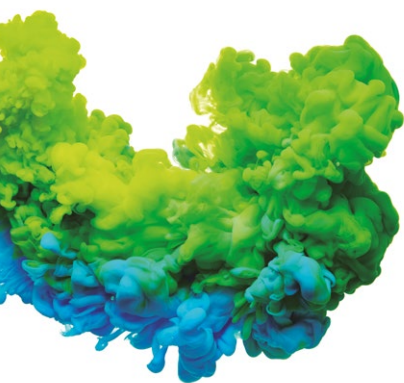

C. Energia, 12 - Pol. Ind. La Quintana
08504 Sant Julià de Vilatorrada
BARCELONA (SPAIN)

SALES DEPARTMENT

T. +34 93 888 71 53
M. +34 649 482 730
domus@domuslaundry.com
export@domuslaundry.com

AFTER SALES DEPARTMENT

T. +34 93 888 76 73
sat@domuslaundry.com

PARTS DEPARTMENT

T. +34 93 888 76 83
partslaundry01@onneragroup.com



WWW.DOMUSLAUNDRY.COM

